



JAGUAR IAM2.1 AUDIO
CARPLAY / ANROID AUTO



Main Power Cable

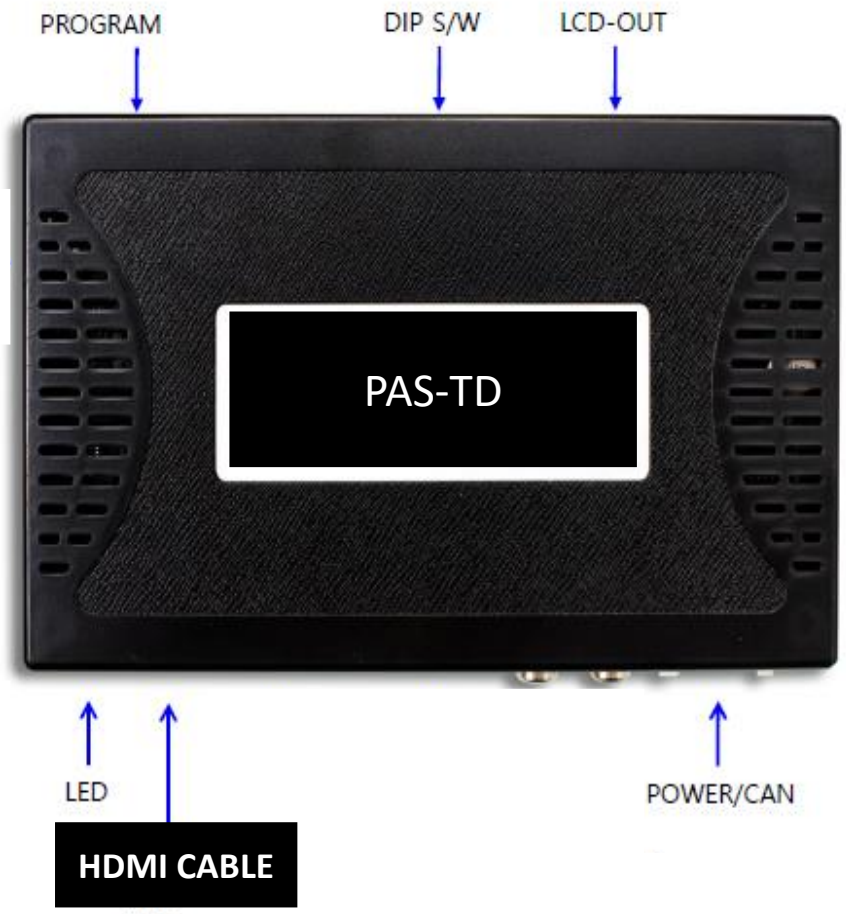

LVDS Cable(800mm) 1 EA



Sub Board 1 EA



FFC(100mm) 1 EA






Jauar
F-Type 8" (from 2014)

Dip switch position



1 , 8 Up / OFF position

2, 3, 4, 5, 6, 7 Down / ON position

WIRING DIAGRAM

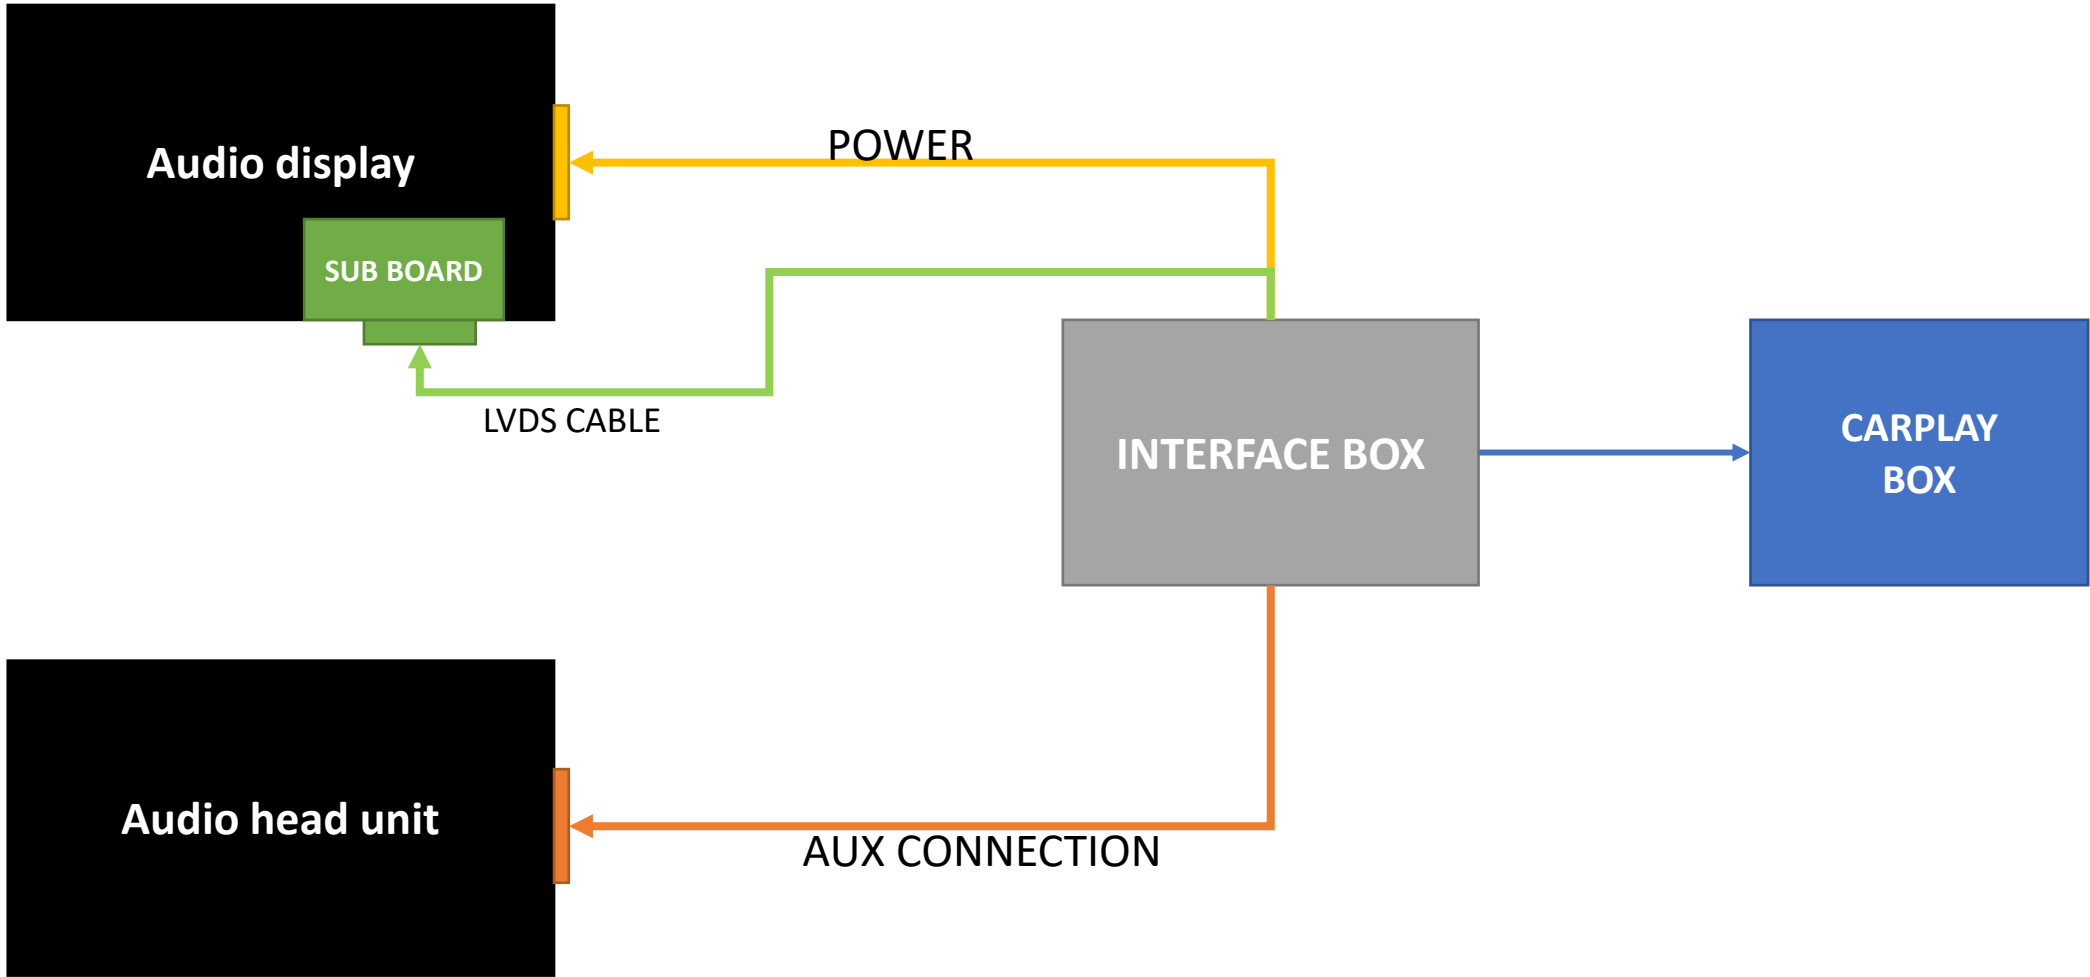

CONNECTION DIAGRAM #2 - Bypass Cable

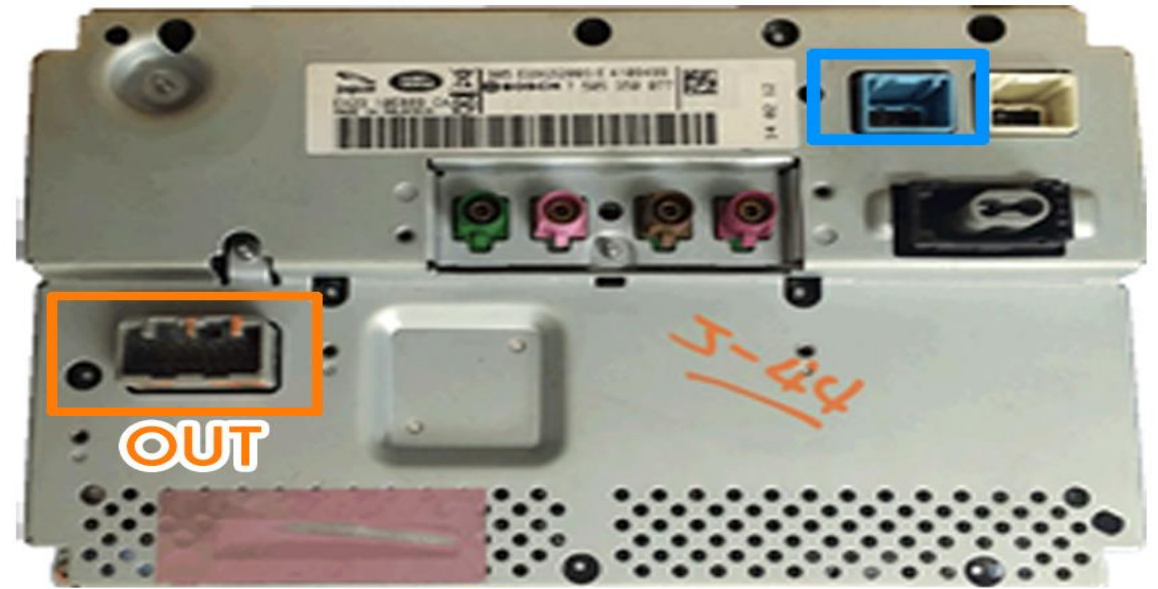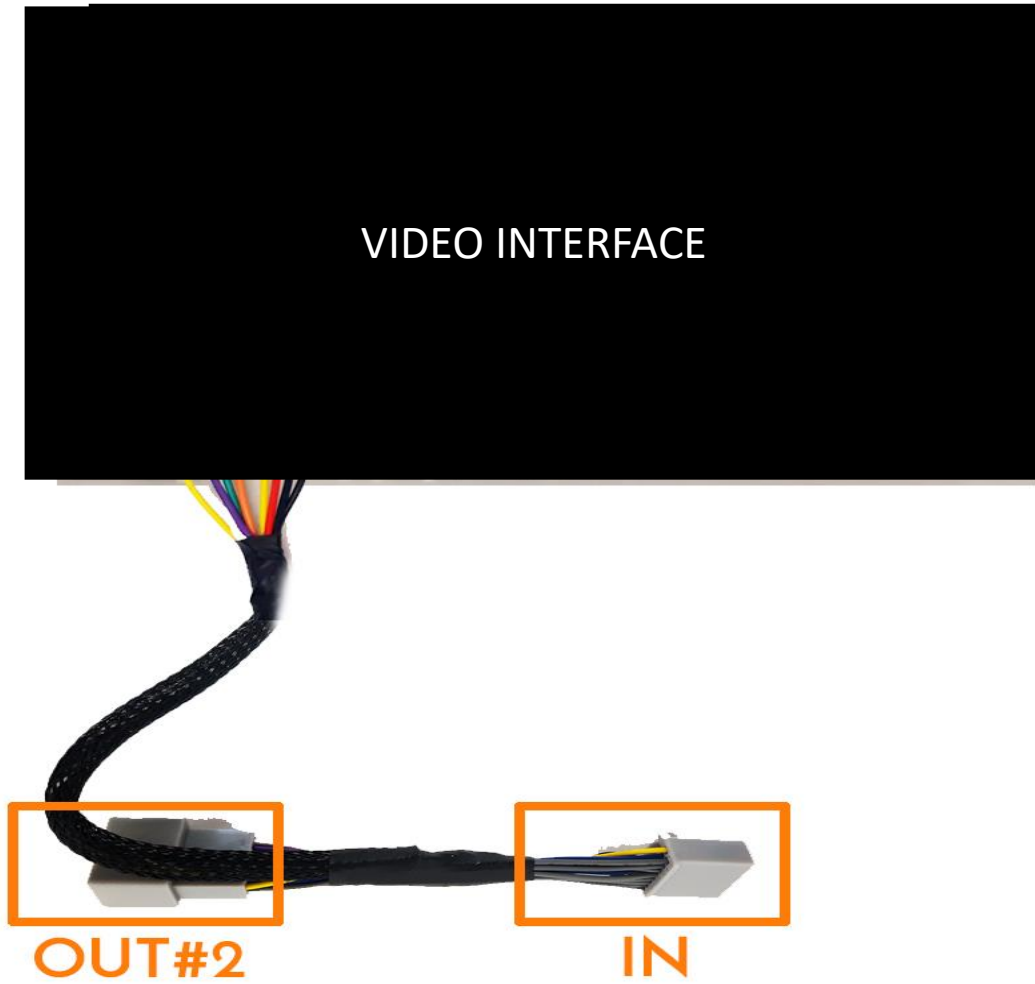

From the Factory Audio OUT, disconnect the cable and connect IN Cable from VES Power Cable.
Then connect the original cable to OUT#2

AUDIO REMOVAL VIDEO LINK

https://www.youtube.com/watch?v=Md9rhIRY_bk

JAGUAR F-TYPE DASH REMOVAL



1. Remove the top screen cover - they are all held by clips



2. After removal of the cover, do the same with climate control cover




3. Remove those bolts those holding screen dash from each sides




4. Remove the facia from the screen, after disconnecting the power cable for buttons




5. Remove those 4 bolts holding display

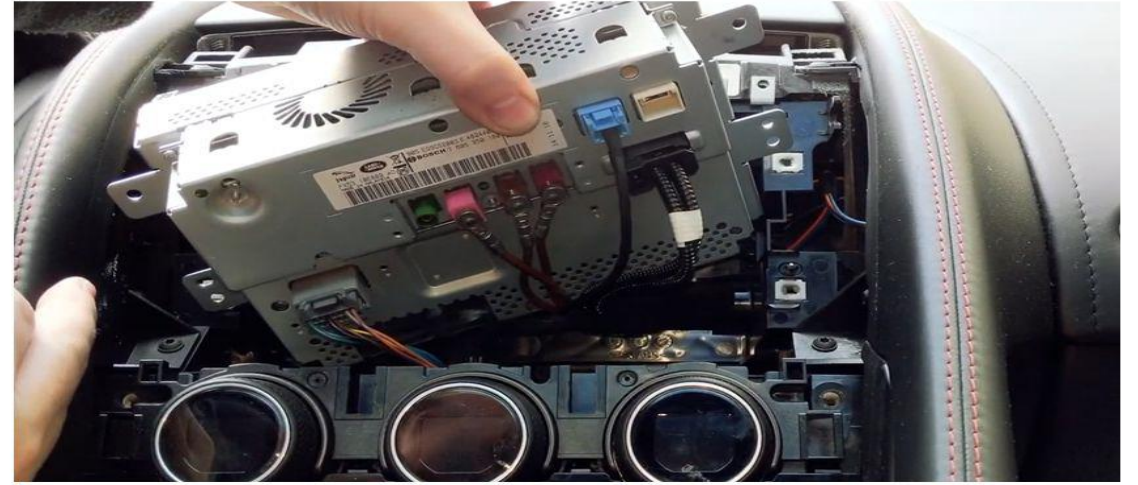


6. Disconnect every cables from behind, and it will allow the whole display to be removed from the dash


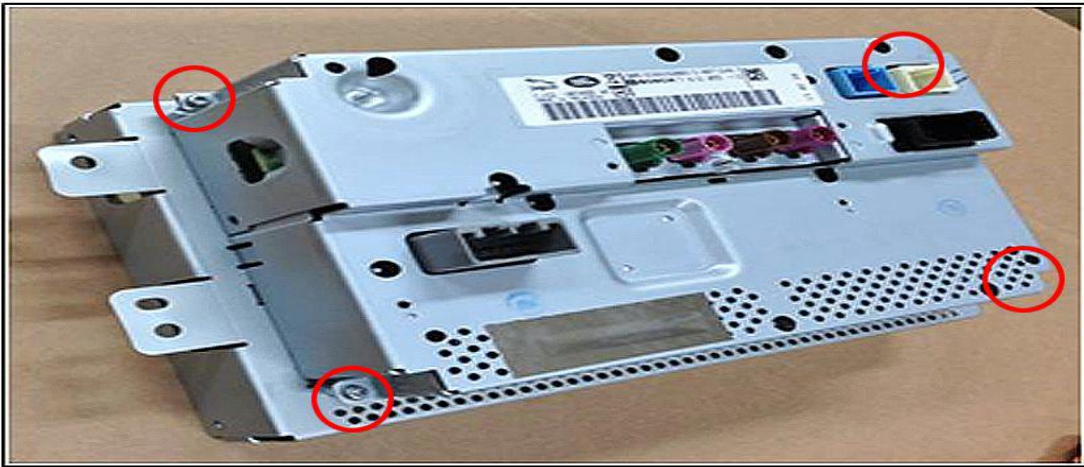


7. Remove those 4 bolts behind the display which will allow screen panel & display to be disassembled.

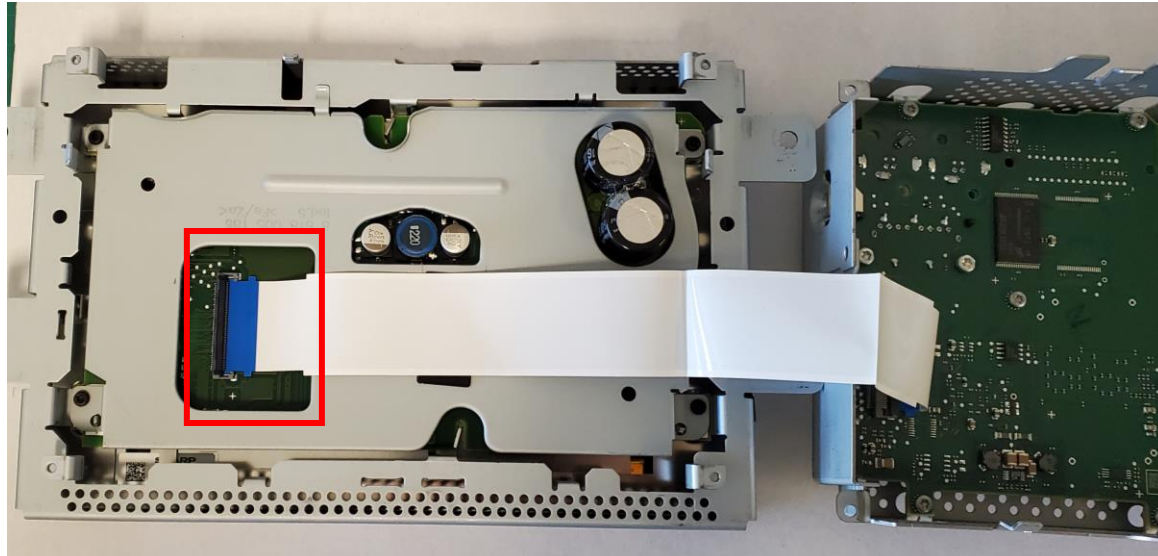



Please disconnect the original FFC cable from Display PCB

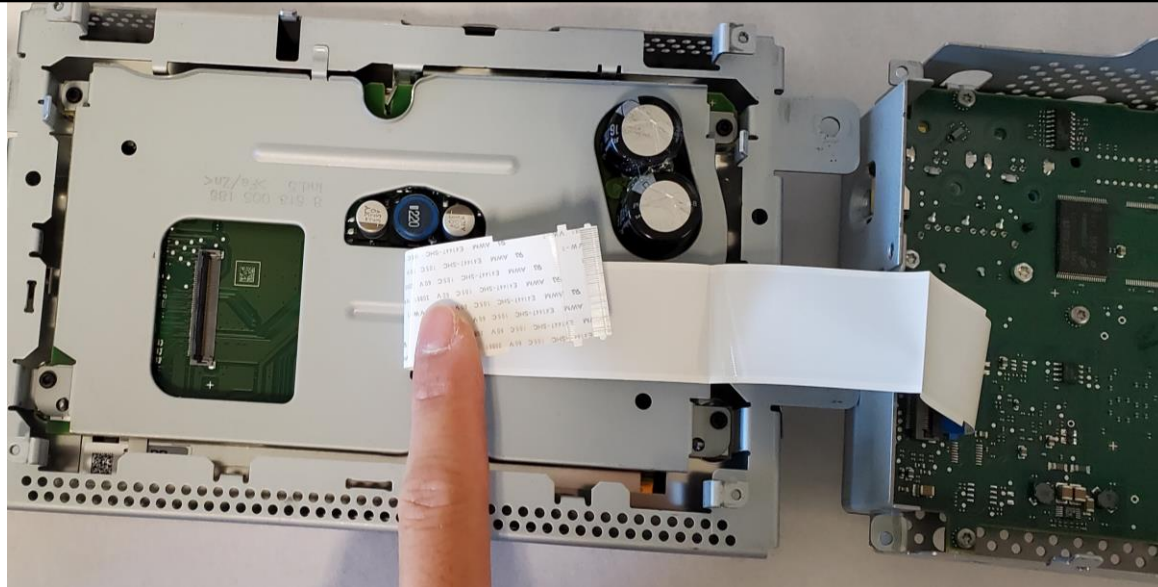

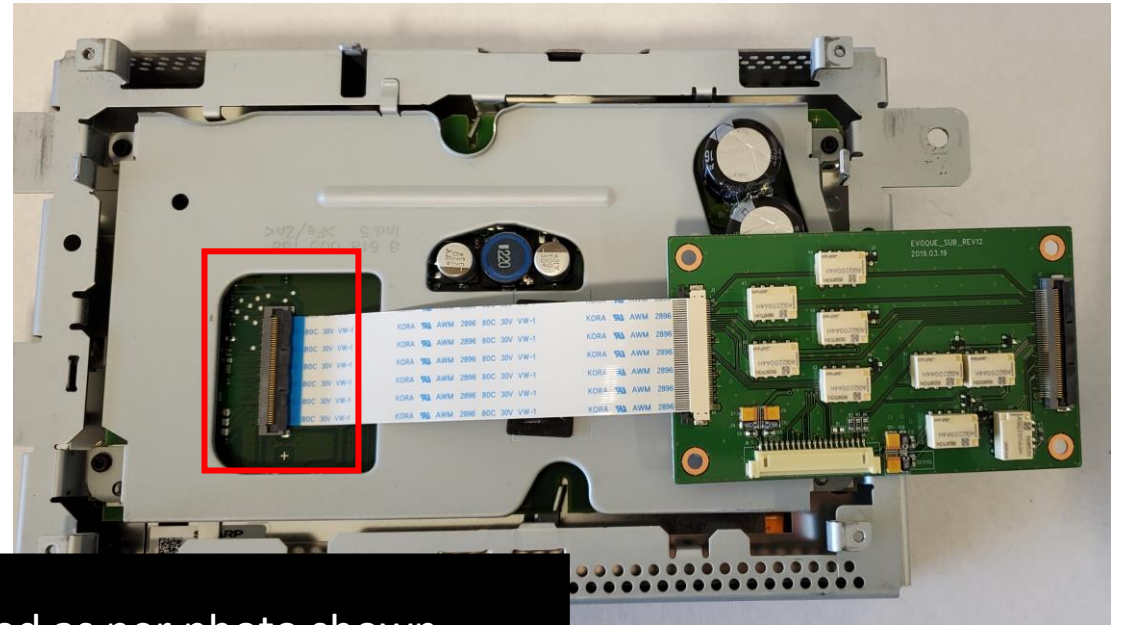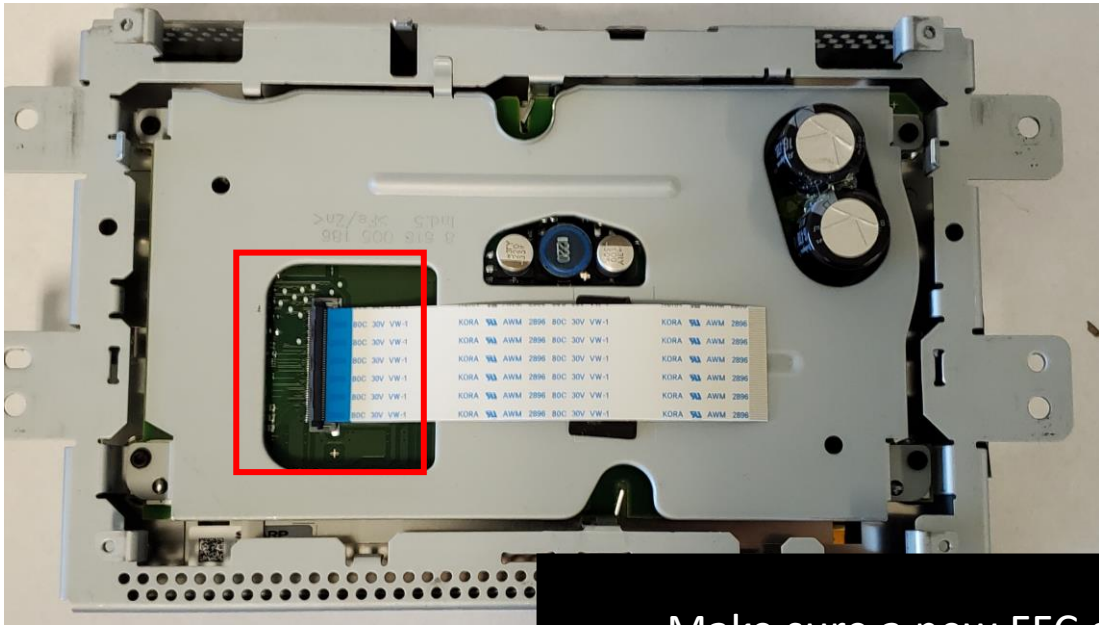


Make sure a new FFC cable fitted as per photo shown

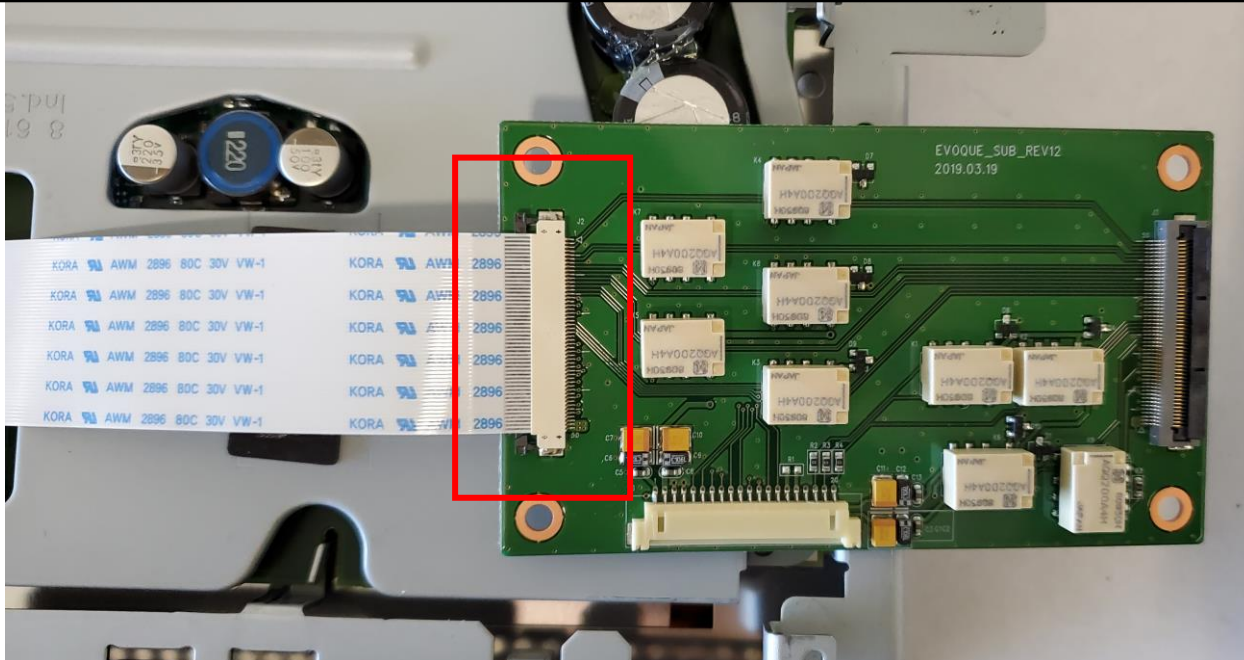


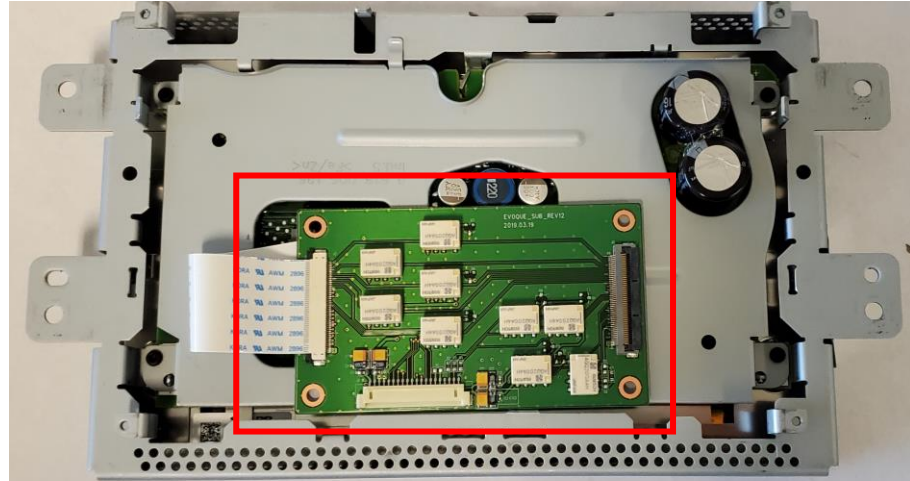


Please secure the board with a double side tape & reconnect the original FFC cable as per photo shown

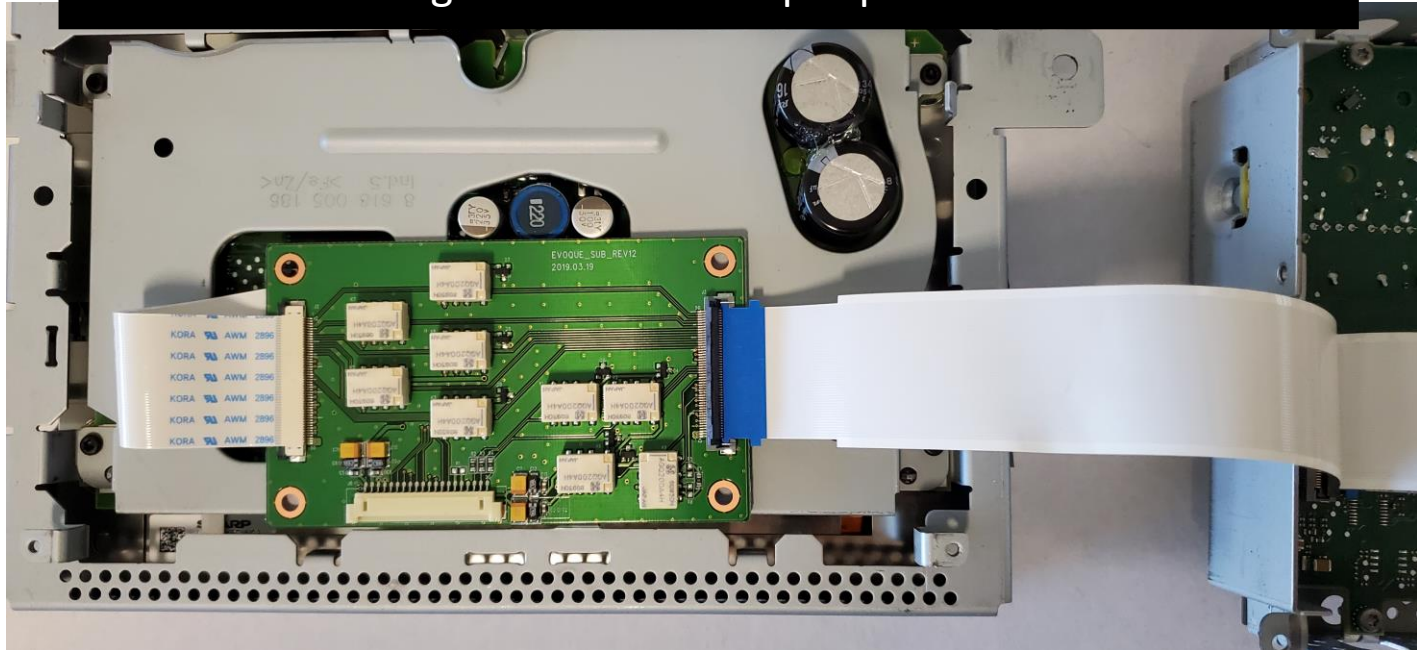


Please put some tape as photo shown

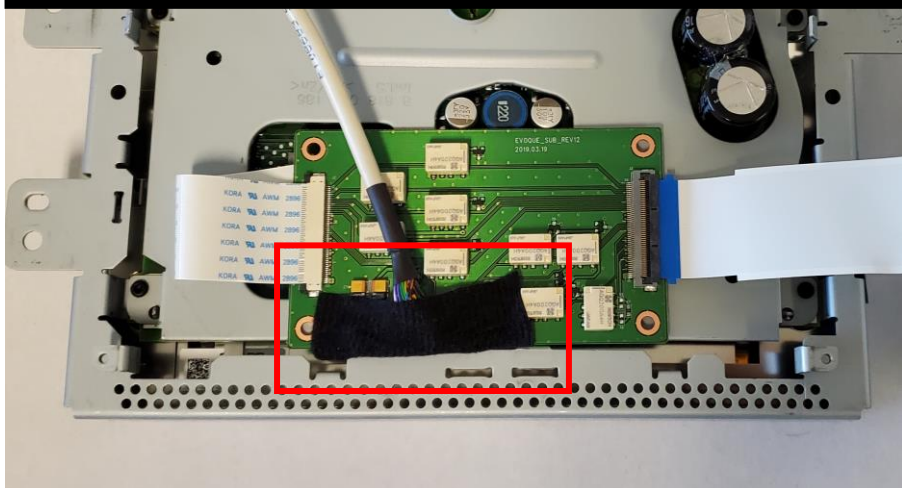


Feed LVDS cable via the hole

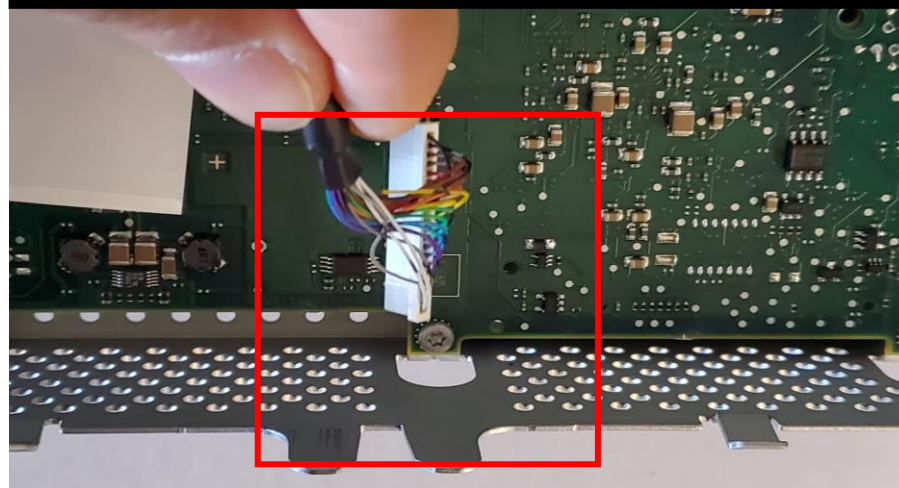

Feed LVDS cable via the hole

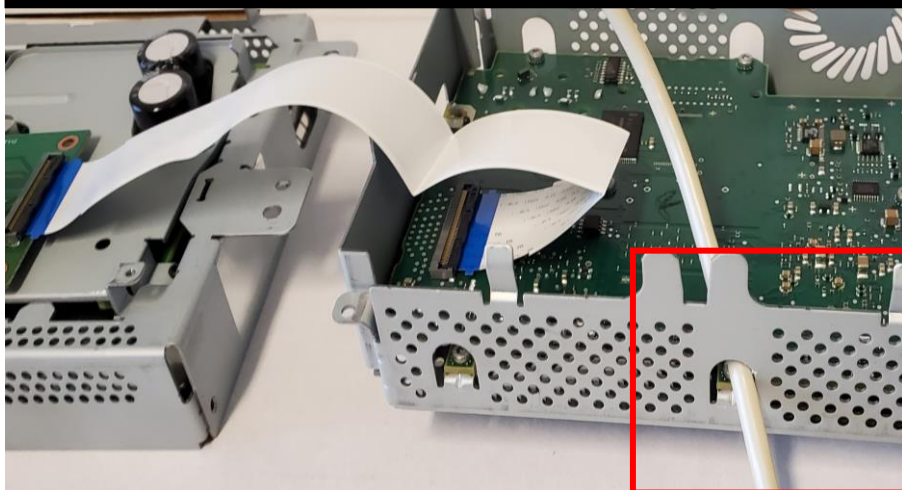


Please check and avoid any kinked wiring

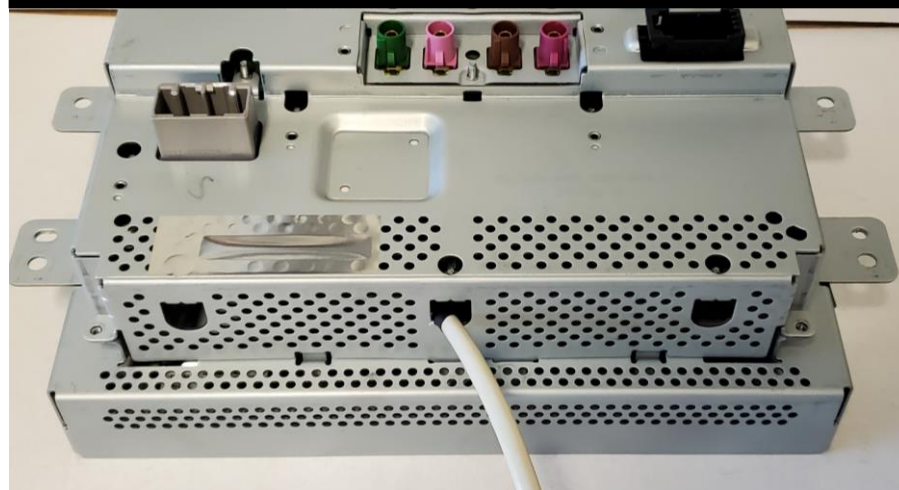




5. Remove those 4 bolts holding display

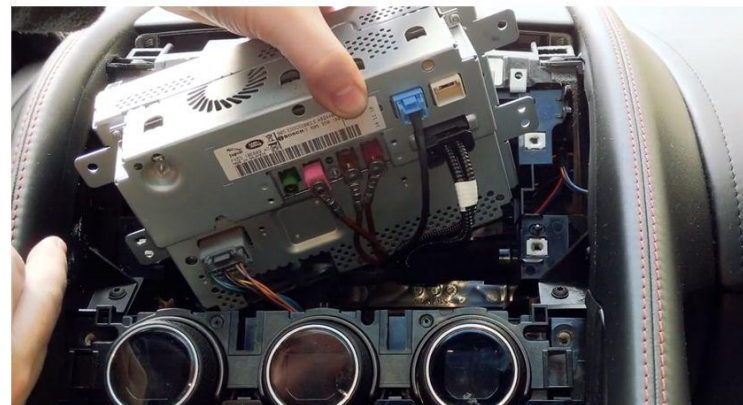

6. Disconnect every cables from behind, and it will allow the whole display to be removed from the dash

CONNECTION DIAGRAM #2 - Bypass Cable

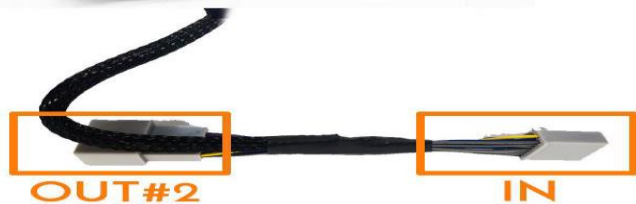


Bypass Cable

From the Factory Audio OUT, disconnect the cable and connect IN Cable from VES Power Cable. Then connect the original cable to OUT#2




Back of the Monitor
Evoque / Discovery 4 / Freelander / RR

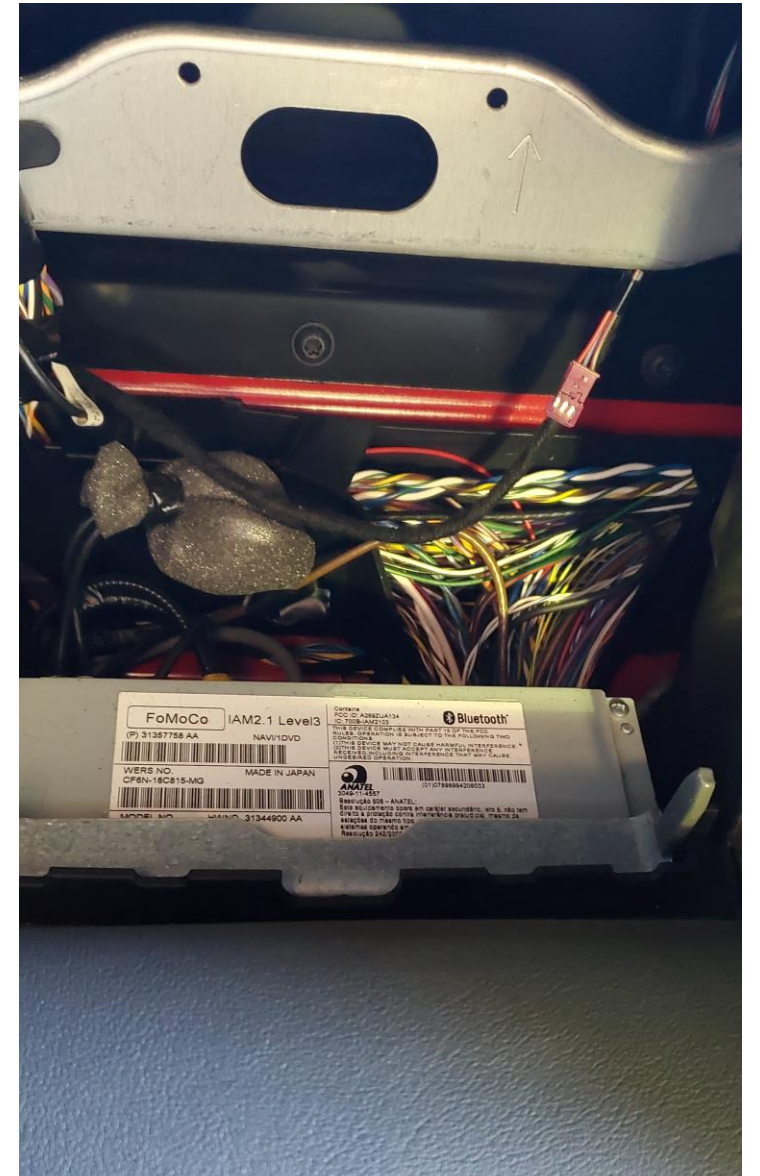


Please remove the cover (hold by clips) from the top area and able to access to radio unit

Location behind centre console
(where the CD slot is)

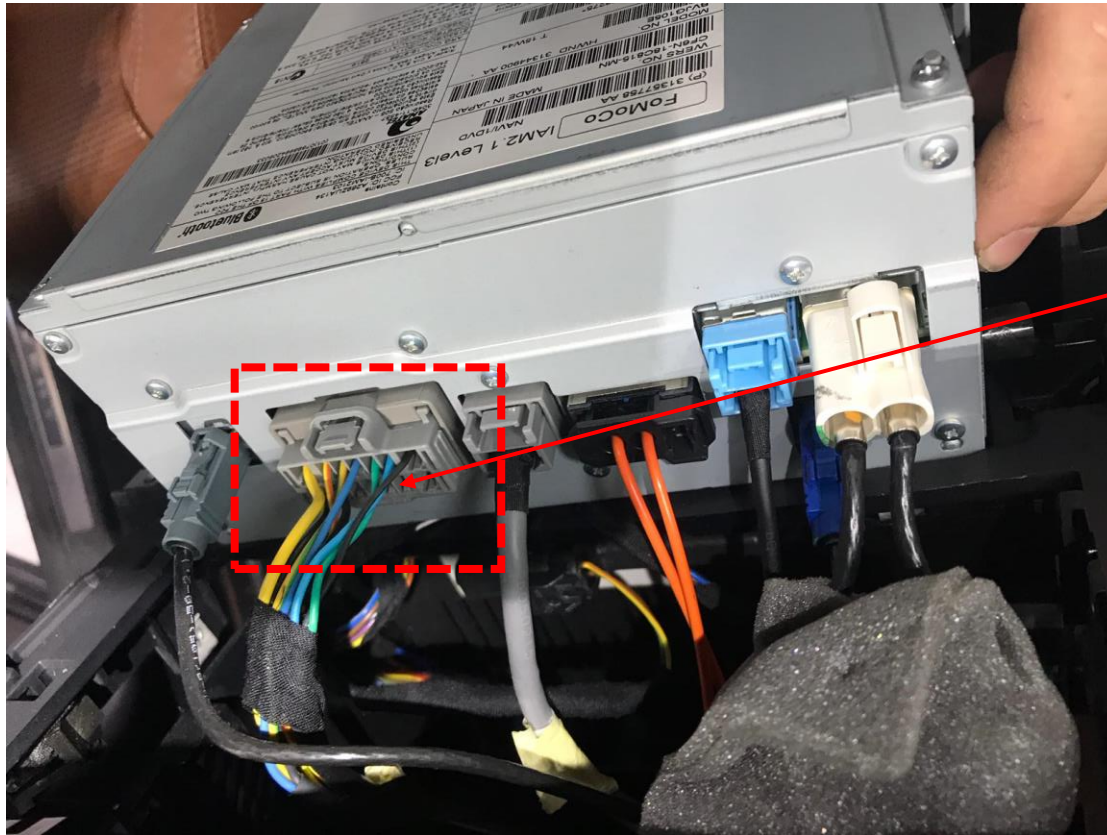


**BYPASS AUDIO
POWER PLUG
BY USING NEW PATCH
HARNESS**

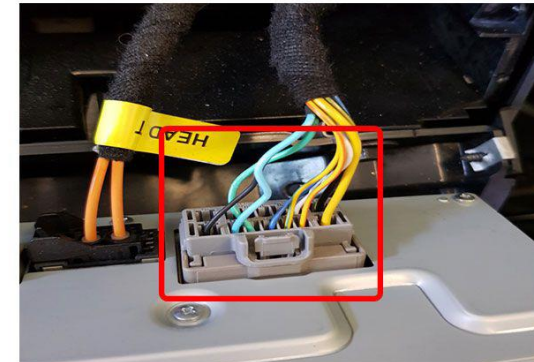

Mode Change Button - Jaguar F-FACE



Return OEM display



mode change

DARK / NIGHT MODE




MAIN UNIT

NetPlay INPUT plug has ILL wire,

If you tap this ILL wire to ILL signal wire such as **park light or any interior light** which is illuminated on by headlight switch

Then CarPlay & Android Auto mode will switch to dark/night mode by the headlight switch


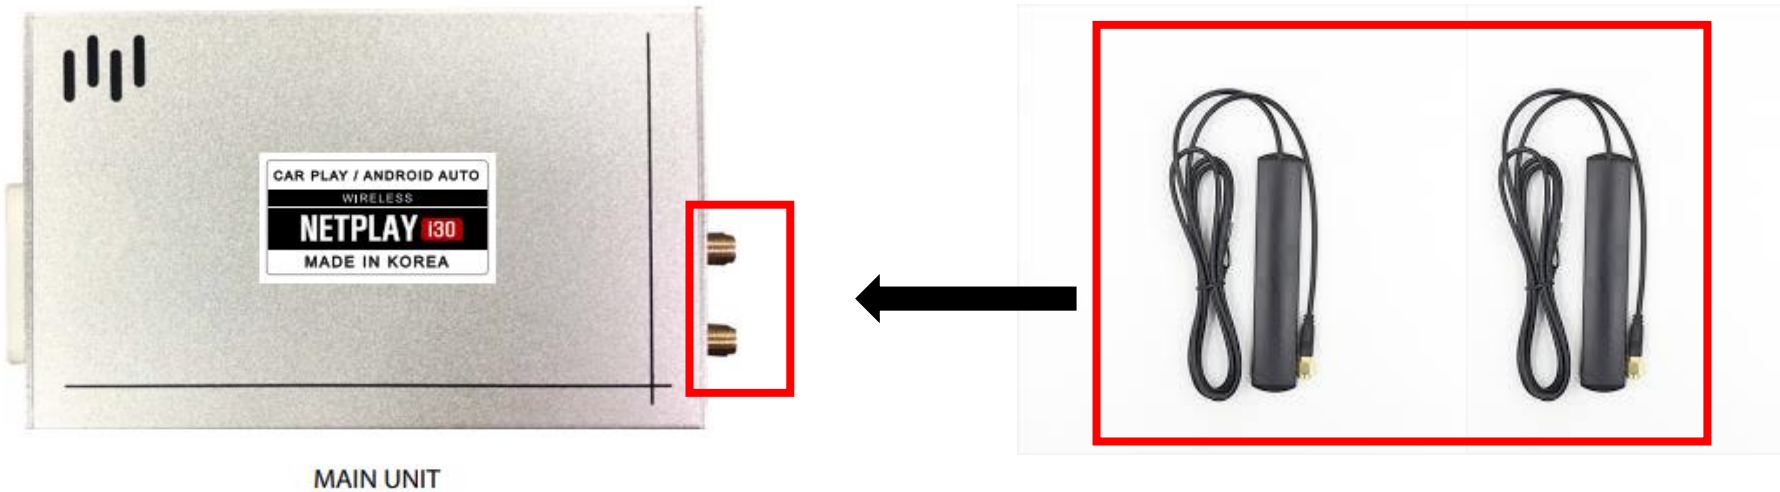


THE WIFI ANTENNA FOR YOUR WIRELESS CARPLAY SYSTEM

Please hide two antennas nearby the phone location or behind the plastic panel such as glovebox area or under the center console,

Don't put the antenna behind the metal panel or behind the display & audio unit

OSD Programming - After Installation is almost finished.

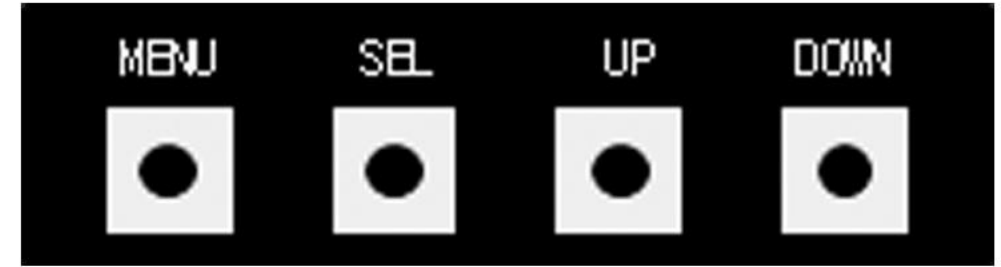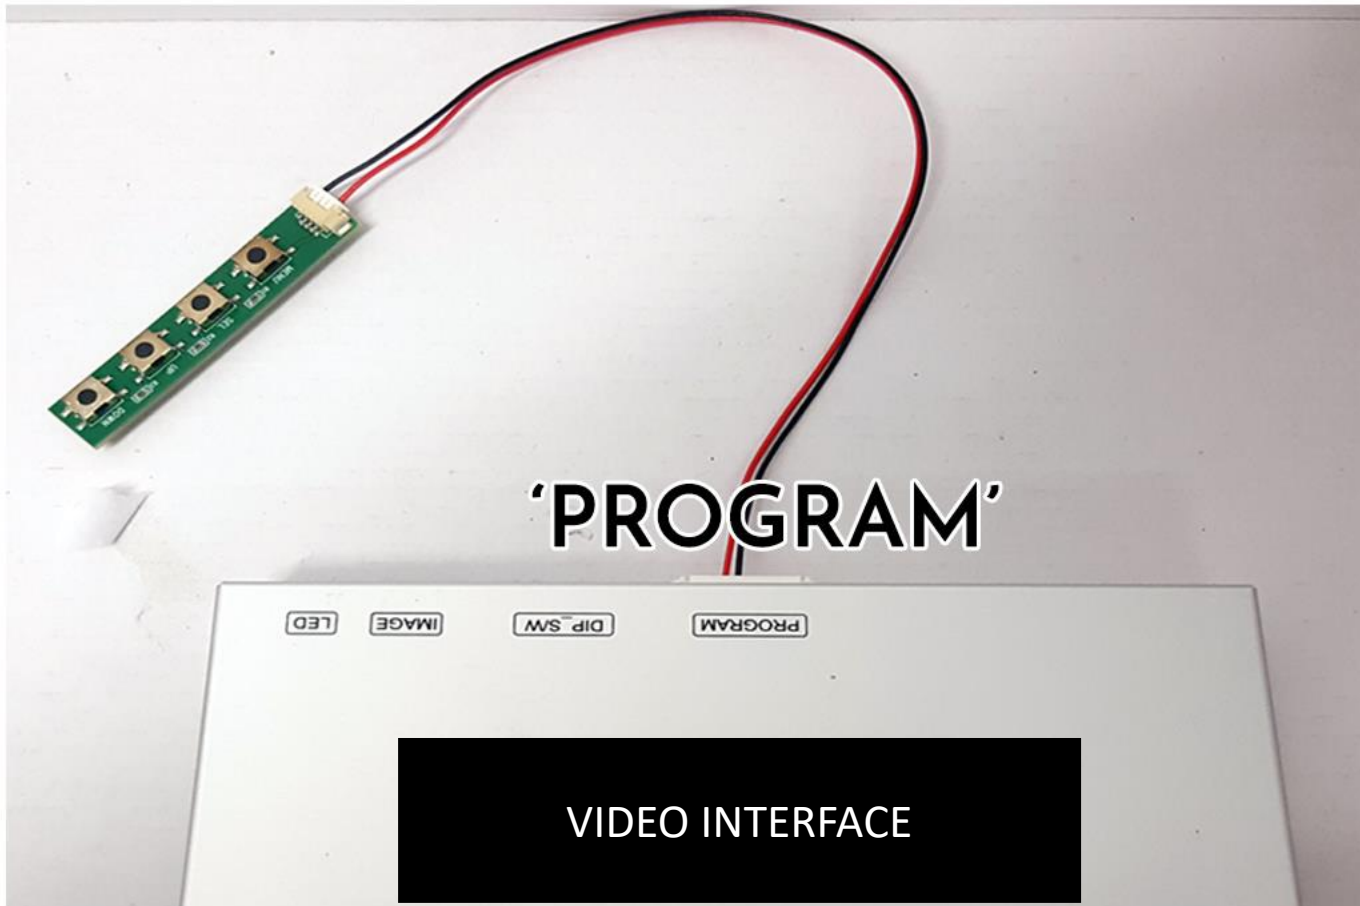

MENU

Turn OSD Setup On / Off

SEL

Item Selection & Value Selection

UP

Item Selection & Selected Value Increase

DOWN

Item Selection & Selected Value Decrease

- Connect OSD Remote connector to the 'PROGRAM' port of VES Interface.
Once setting is finished, disconnect the OSD Remote.

OSD(On Screen Display) Control

OSD control



MENU	Press to display when there is no OSD screen. When OSD screen is on, press it to EXIT or OFF.
SEL	Item Selection, Value Selection
UP	Item up Increase selected value
DOWN	Item down Decrease selected value

PLEASE MAKE SURE
PRESS MENU BUTTON FROM THE BOARD
CONFIG -> NAVI RGB ->DIGITAL

THEN
PRESS MENU BUTTON FROM THE BOARD
OPTION -> NAVI COM -> FINE


Mode State


MENU	Option	NAVI
Config	RearCam-Type	ExtDevice
Option	RearCam-Power	Auto
Image	RearCam-Det	GEAR
Screen	AV Mode	Off
Parking	FrontCam-Type	ExtDevice

First Menu


Second Menu

Third Menu

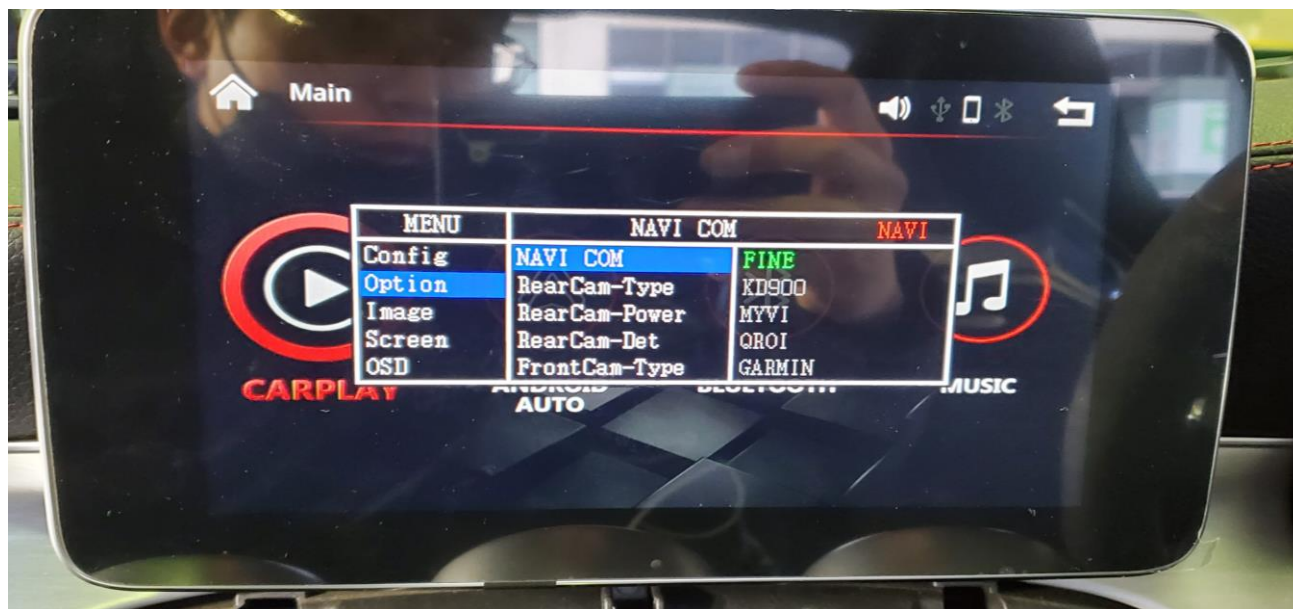

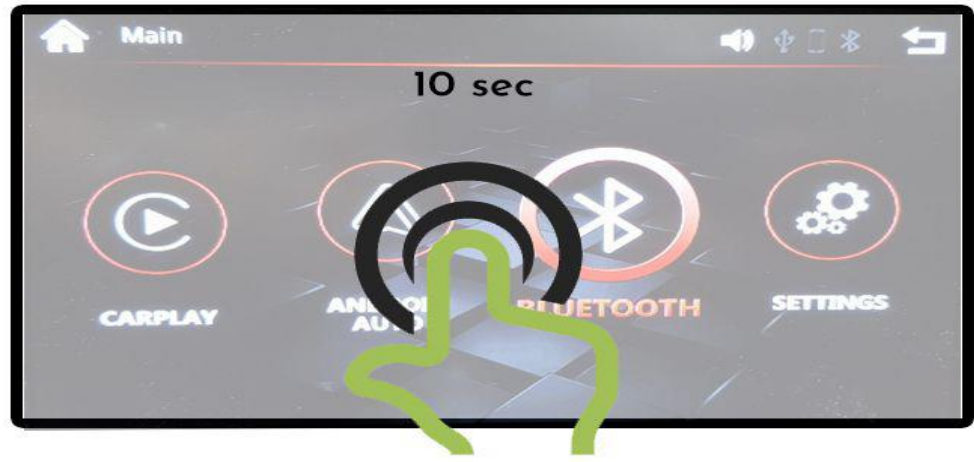

From the main menu screen (outside of CarPlay / Android Auto)
Touch and holding the center of the screen for **20 seconds**
will trigger touch calibration mode.

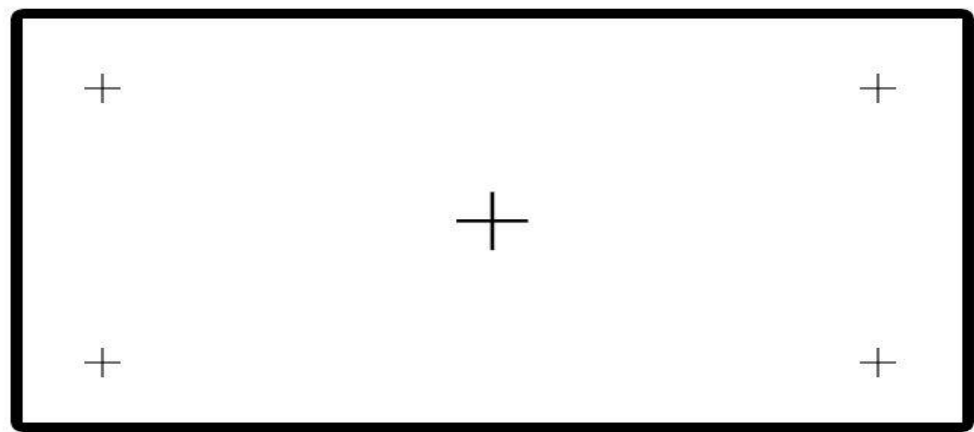



Go to SETTINGS



SELECT 'SYSTEMS' and press SWC Learning



Press the Track button once, then press and hold the actual steering wheel buttons till it assigns.

OPTIONAL FEATURE

SWC LEARNING

- Press the desired function button on the screen
- Press and hold the steering wheel button till it creates number codes & disappears by itself.




Preparation

- Please select an **AUX mode from the original CAR media list** then go to CarPlay mode.
- Keep the Bluetooth connection between **the phone and car Bluetooth**

How to use a wireless CarPlay system



1. Go to Bluetooth setting and do search devices
2. Select ex) CarPlay xxx.xx and will see a message of using a CarPlay function from the phone

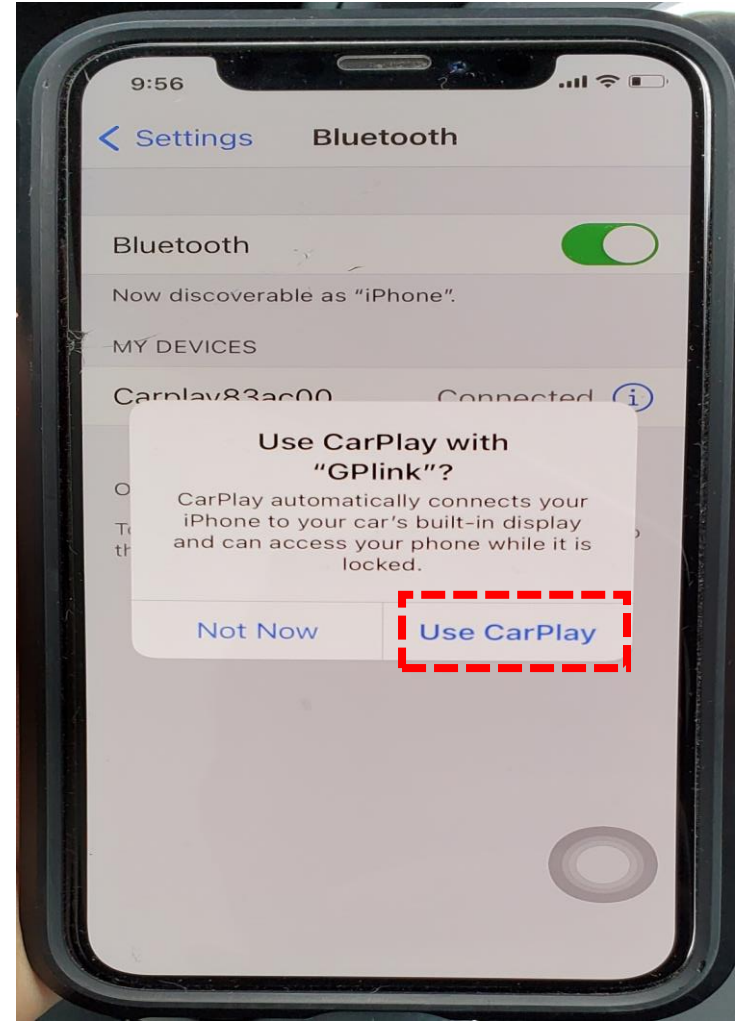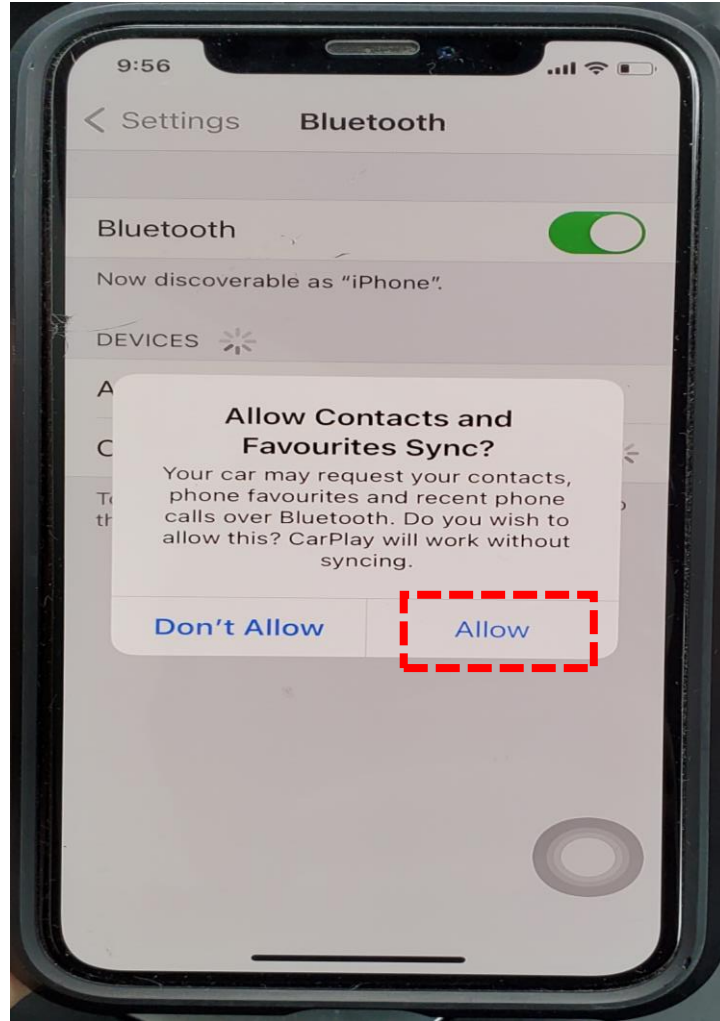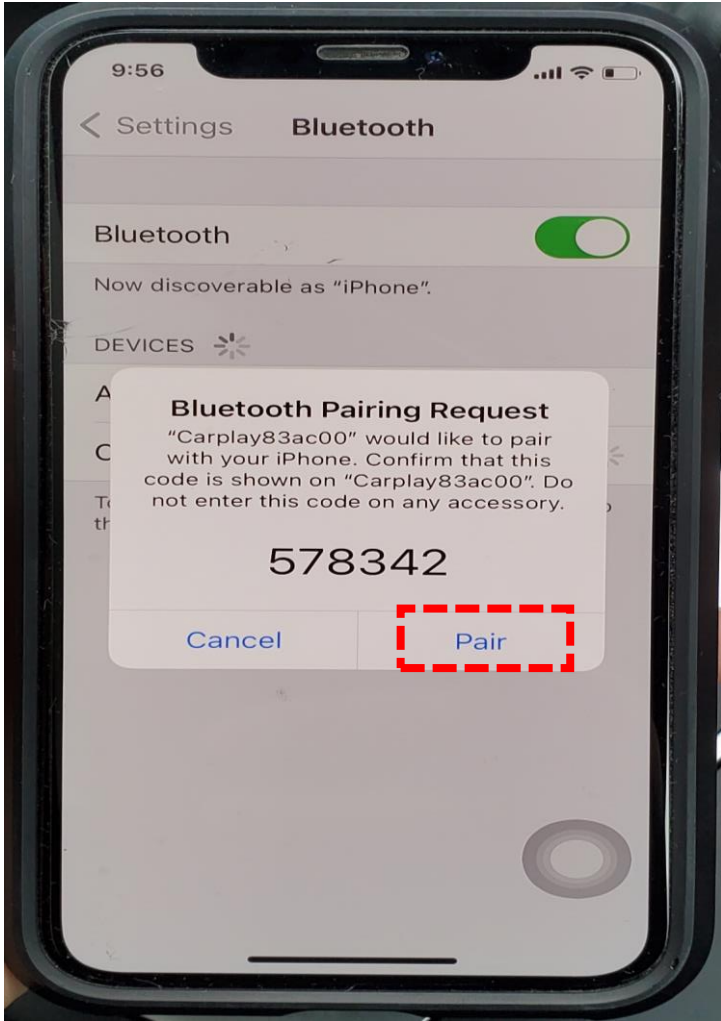

How to manually connect wireless CarPlay & Android Auto if it's not connecting instantly.



If It's not taking you to CarPlay & Android Auto system instantly, press back arrow as per photo



Go to Bluetooth & press 1 then press 2

The system will do re-connecting it

***Please don't touch your phone at this stage.**

HOW TO USE WIRELESS CARPLAY

- Please press **BLUETOOTH** icon from NetPlay main screen and Pair your iPhone to **Netplay's Bluetooth**
- Unlock your iPhone and allow to use WiFi connectivity ***The message will be shown when the iPhone is paired to NetPlay Bluetooth mode**



Q&A

- **When CarPlay screen is flickering**

The flicker issue can be caused by a following reason

1. HDMI cable is not connected properly
2. HDMI cable has an internal damage
3. Need to check NAV select model from OSD menus