

1. **WARNING: The retaining strap is a safety critical item and must be replaced to prevent the trim detaching in the event of the side curtain airbag deployment.**


**NOTE:** When installing the new retaining strap and rivet make sure the old clip has been removed from the body before pressing the trim into place

To install, reverse the removal procedure.


## C-Pillar Trim Panel (76.13.73)

### Removal

1. Remove the rear seat bolster.
2. Detach the rear safety belt.

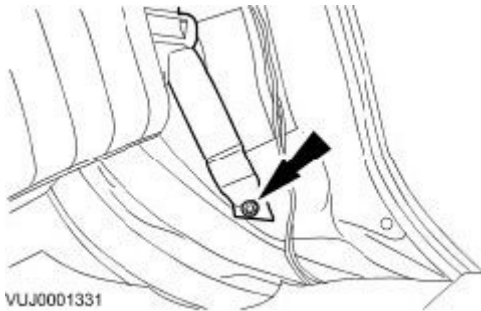

3. Locally detach the door aperture [weatherstrip](#).
4. Detach the C-pillar trim panel.

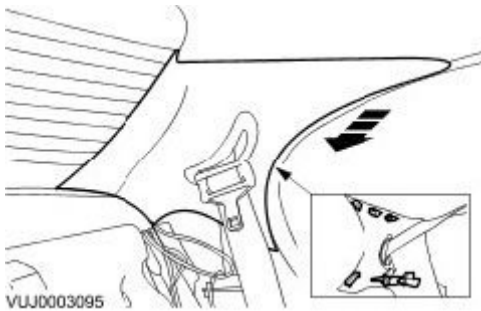

5. Remove the C-pillar trim panel.
  - Cut the C-pillar trim panel retaining strap.



### Installation