

Power Fold-back Mirrors - Fitting Instructions

Model: V8/XJ Saloon Series 98MY (Vehicles fitted with memory function)


Introduction

Power fold-back door mirrors may be fitted to allow the vehicle to be parked in a restrictive parking space.

Fitting instructions


Removing the existing mirror

- Make sure that the radio code is readily available, for when the battery is reconnected the radio will need to be re-coded before it will operate.
- Open the driver's door and lower the driver and front passenger door windows.
- Lift and remove the luggage compartment floor and right-hand trim panels.
- Disconnect the battery.
- Remove the black cap that covers the door handle escutcheon securing screw, arrowed, Fig. 1.

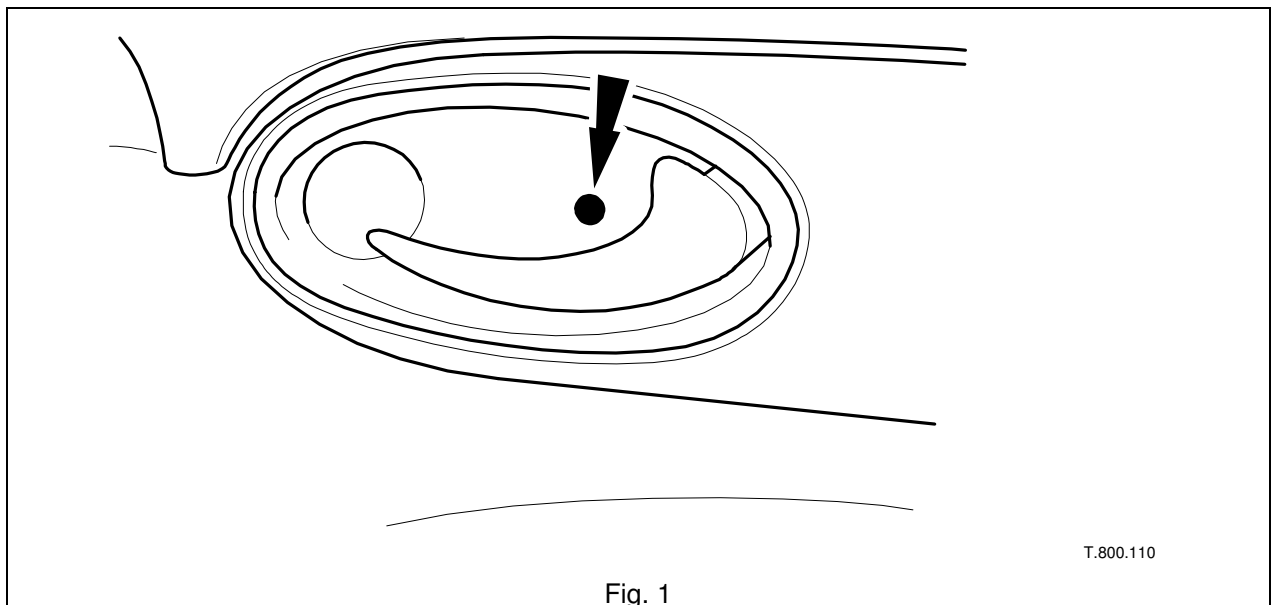


Power Fold-back Mirrors - Fitting Instructions

- Remove the door handle screw, arrowed, Fig. 2 and escutcheon.

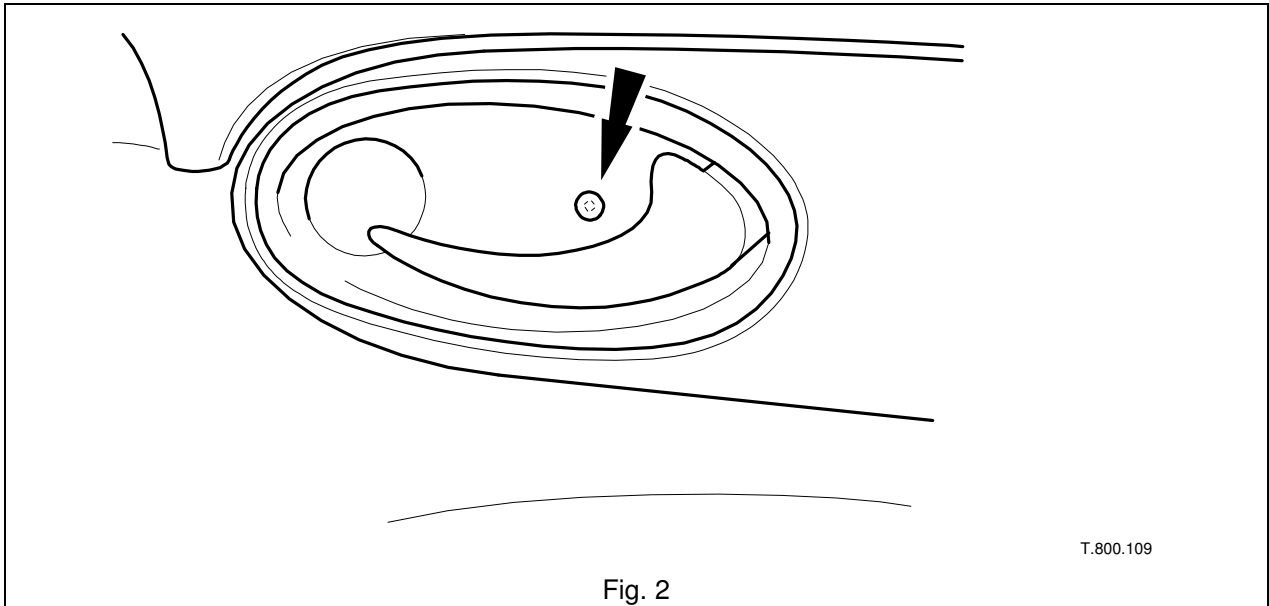


- Remove the door wood veneer panel by lifting the tapered end, then sliding it rearwards to detach it from the internal clips, arrowed Fig. 3.

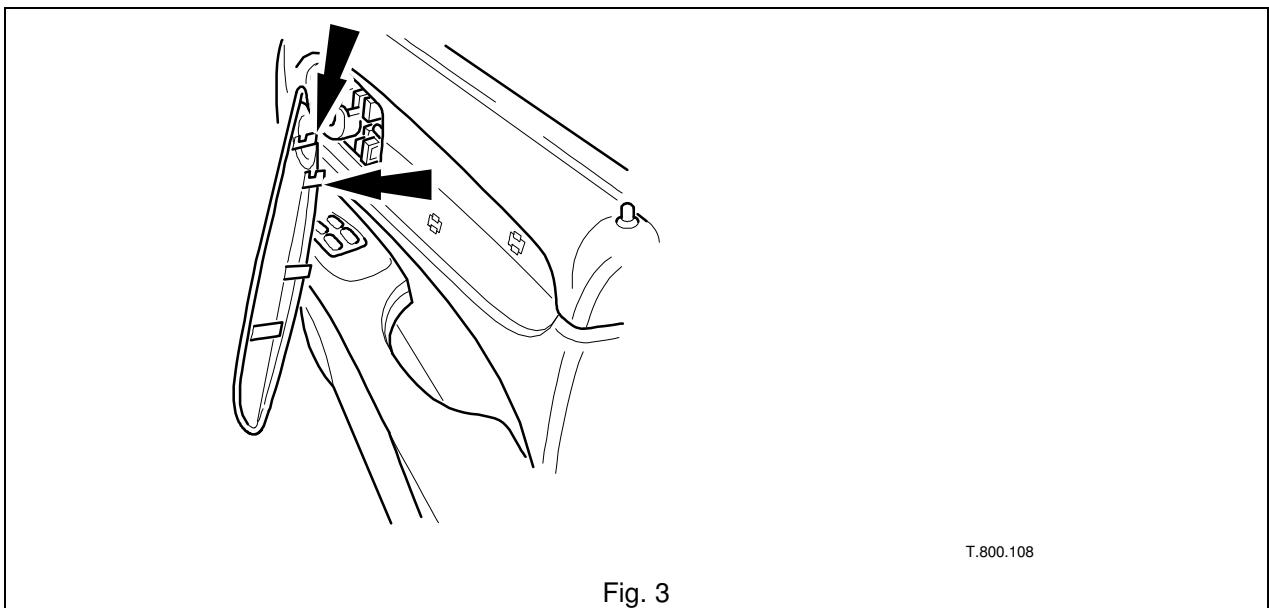


Power Fold-back Mirrors - Fitting Instructions

- Undo the door armrest long screw, arrowed, Fig. 4 and remove the armrest.

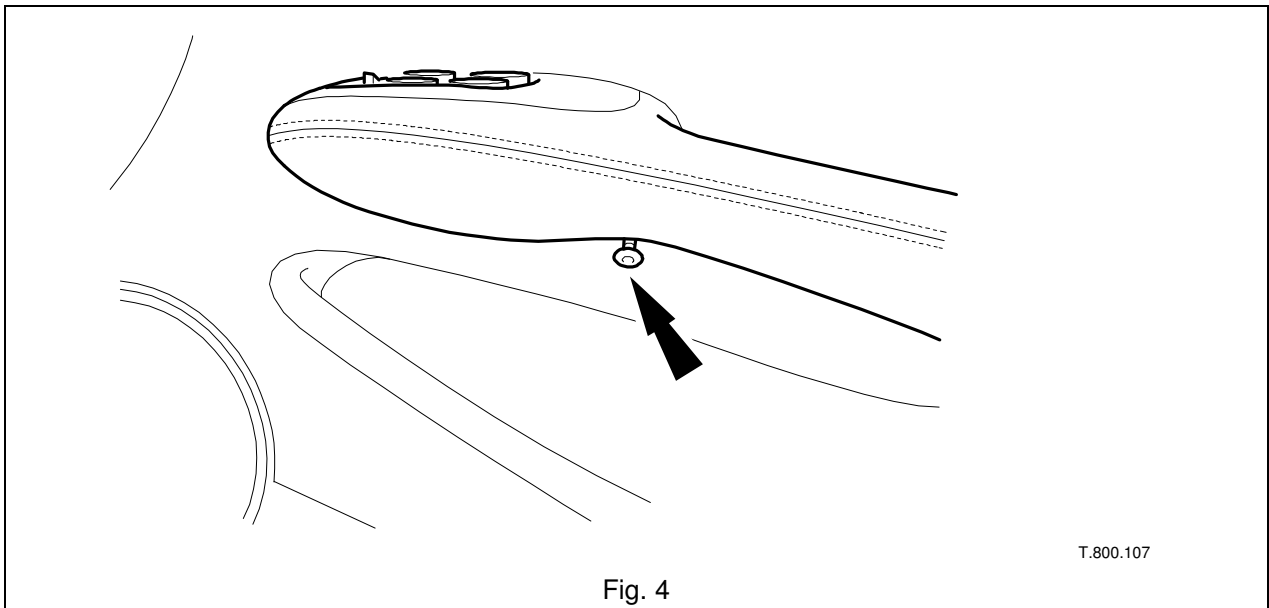


- Prise off the door trim panel, Fig. 5.

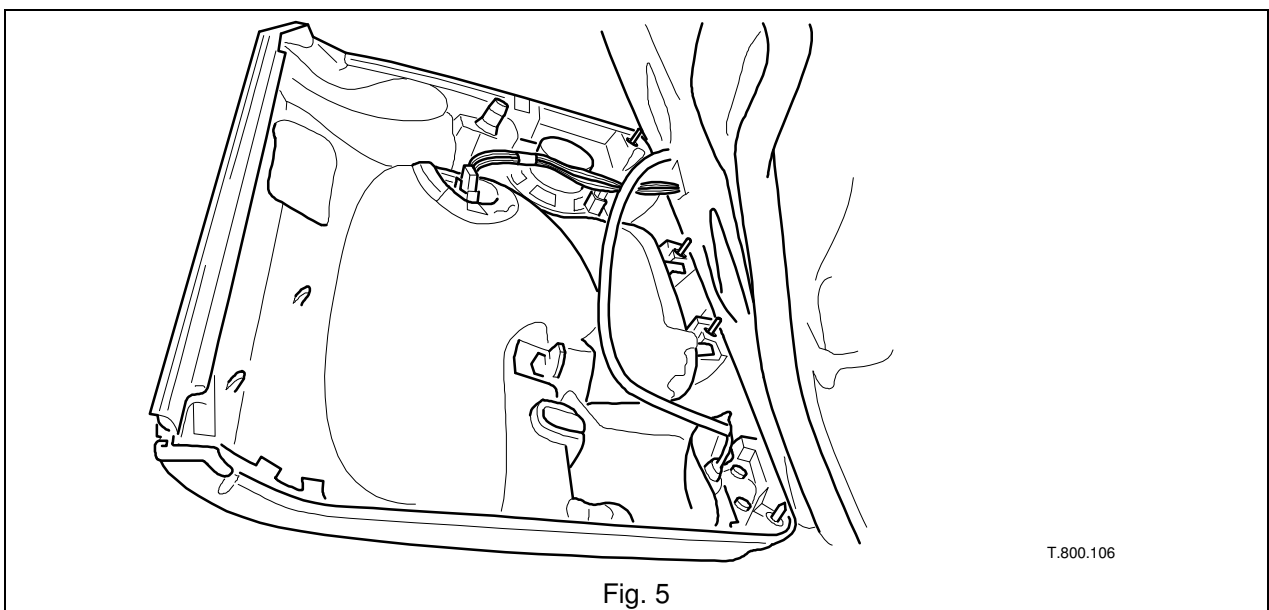


Disconnect the harness plugs from the door switch pack, radio speaker and door guard light.

Power Fold-back Mirrors - Fitting Instructions

- Prise off the door mirror inner panel, arrowed, Fig. 6.

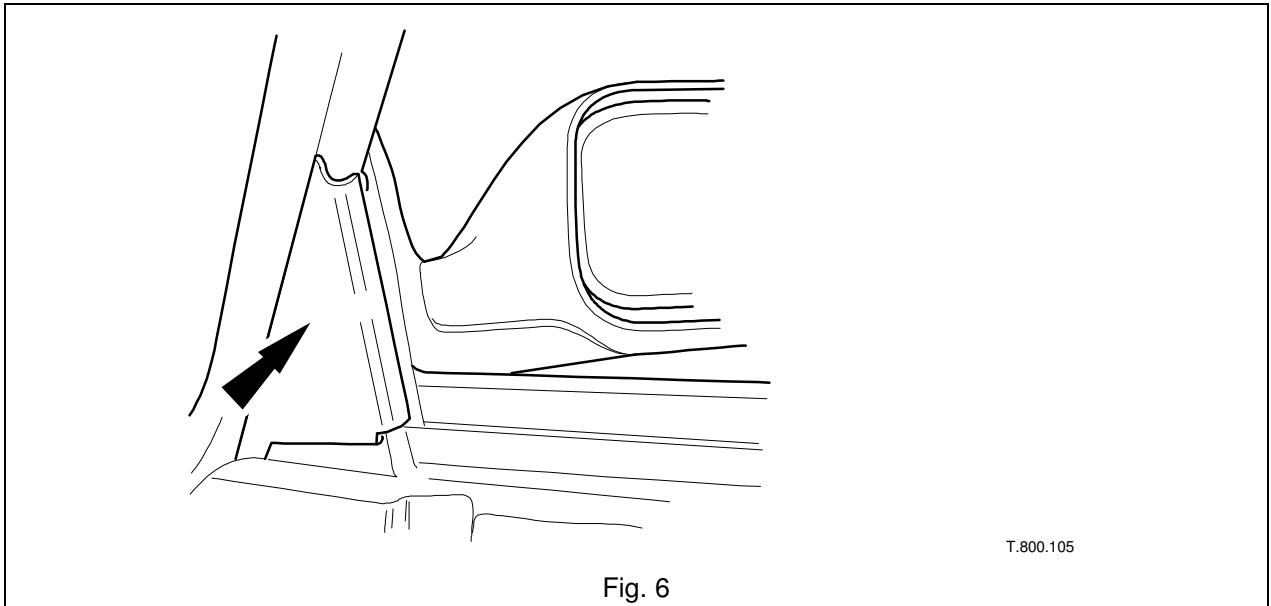


- Disconnect the mirror multi-plug, Fig. 7.

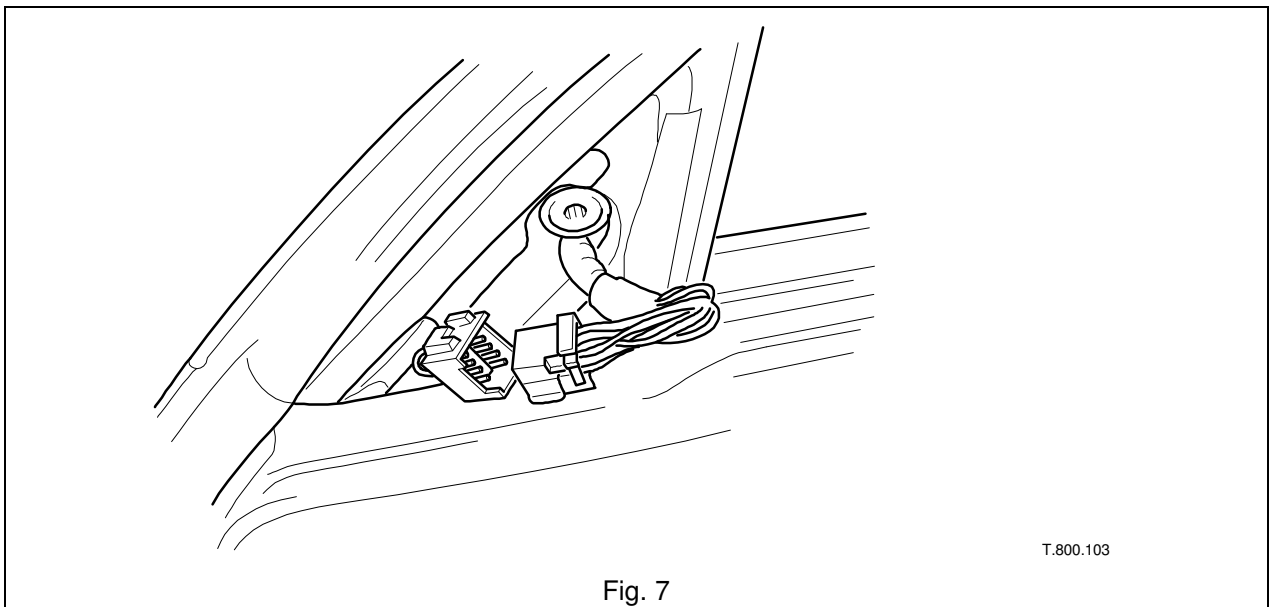

Power Fold-back Mirrors - Fitting Instructions


- Loosen the single securing screw and whilst supporting the mirror through the open window, remove the screw and washer and take off the mirror, ensuring the mirror harness passes through the aperture, Fig. 8.

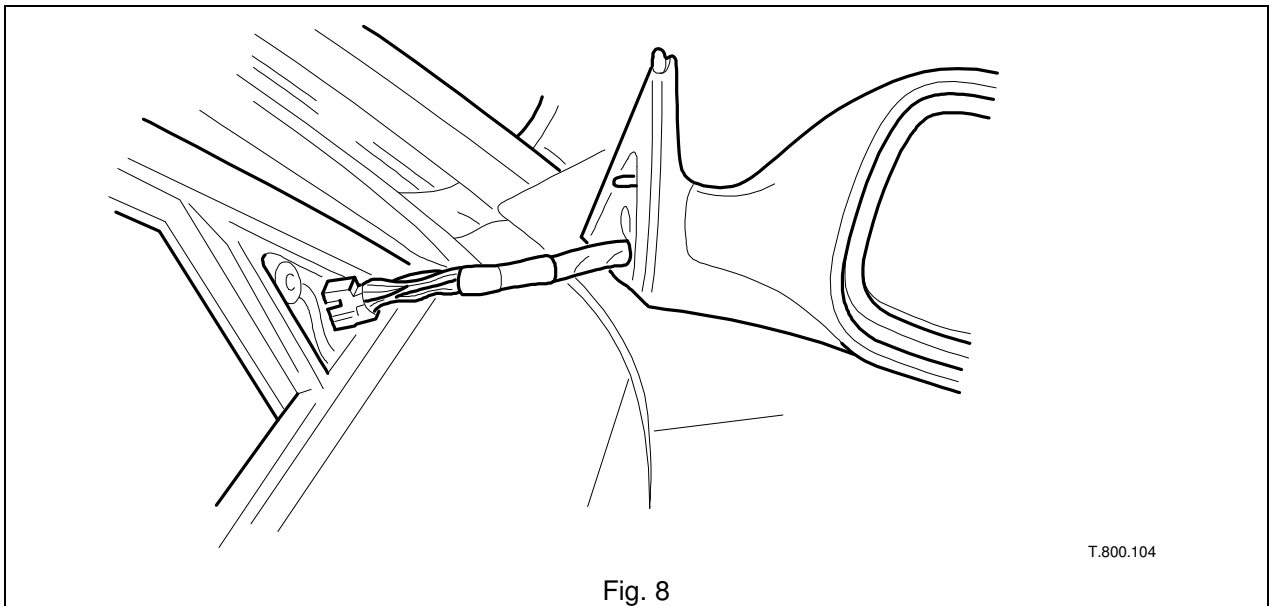

- Retain the mirror screw and washer for later use.


Fitting the power fold-back mirror

- Fit the new mirror in position with the dowel, 1 Fig. 9 located in the mirror panel and the harness, 2 Fig. 9 passed through the aperture.

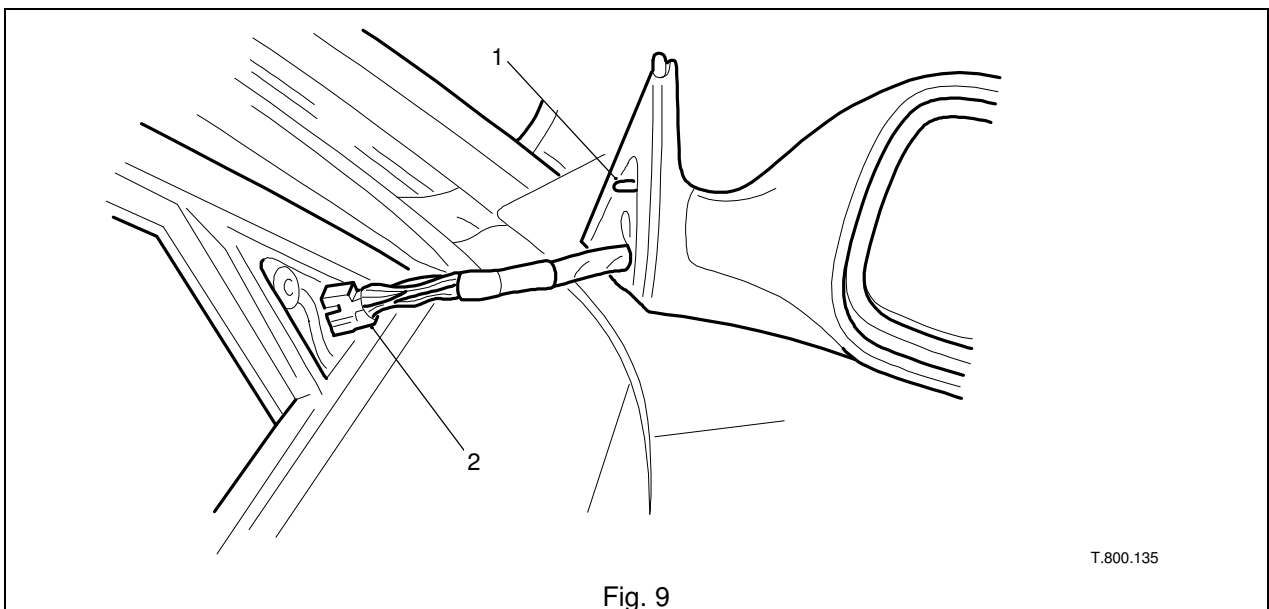

Power Fold-back Mirrors - Fitting Instructions

- Whilst supporting the mirror, fit the original washer and screw and tighten securely.
- Reconnect the mirror multi-plug and push the plug into the stowage position at the bottom corner of panel, Fig. 10.

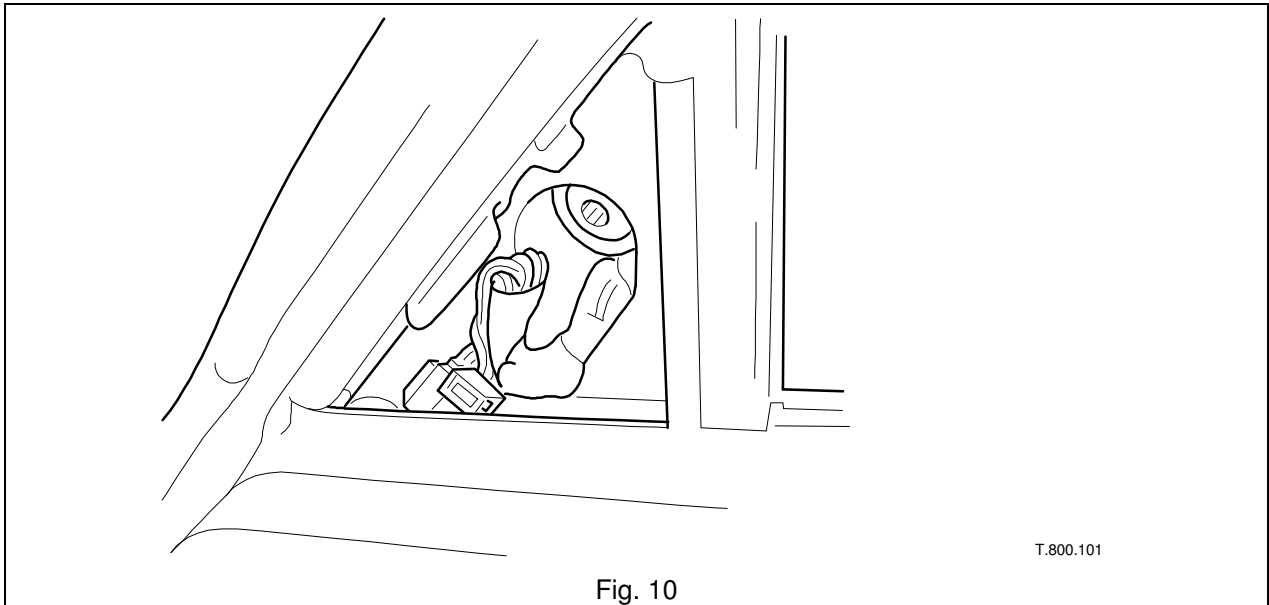

- Refit the mirror back panel.
- Refit the door trim panel, armrest, veneered panel and door handle escutcheon.
- Repeat the procedure to replace the passenger side door mirror.
- Reconnect the battery.
- Close the door windows.
- Refit the luggage compartment trim panels and close the lid.
- Re-code the radio.

Testing the operation of the power fold-back mirrors.

- For the power fold-back mirrors to function, the ignition must be in position 'I' or 'II', the mirror selector switch in the centre position, and the vehicle speed below 19km/h (12mph).
- To fold the mirrors back, move the adjustment button rearwards and release (one touch operation).

Note: Both mirrors should be allowed to fold back fully before they can be returned to the normal driving position.

- To reposition the mirrors, move the adjustment button forwards.

Power Fold-back Mirrors - Fitting Instructions

Note: **Do not** attempt to reposition the power fold-back mirrors manually, **always** use the adjustment button.

Note: After a power supply interruption, (battery disconnection) with the mirrors in the normal driving position, the power fold-back mirrors will operate on the second press of the adjustment button. Thereafter, the switch will operate as normal.

Note: Should either mirror get knocked out of position and repositioned manually, the mirror's head will be loose. To re-engage the mechanism, power the mirrors to the fold-back position, then out to the normal driving position.