



## Floor Console Extension 76.25.05

### Removal

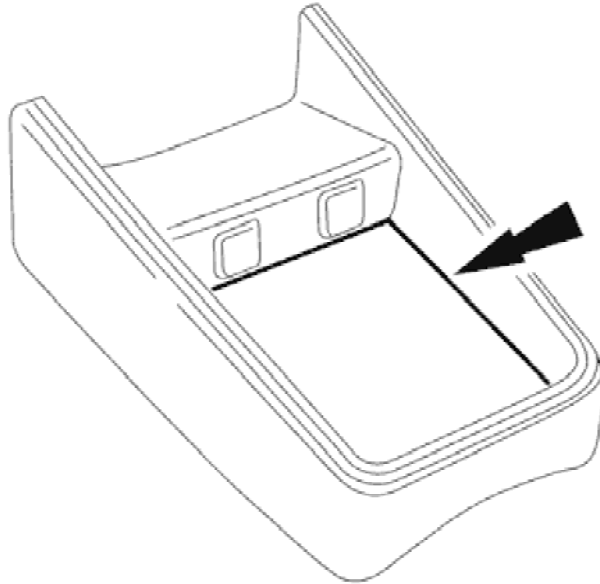


E36362

1. Using a thin plastic lever at the edge and exercising care to avoid damage to surface, remove veneer panel from rear extension.

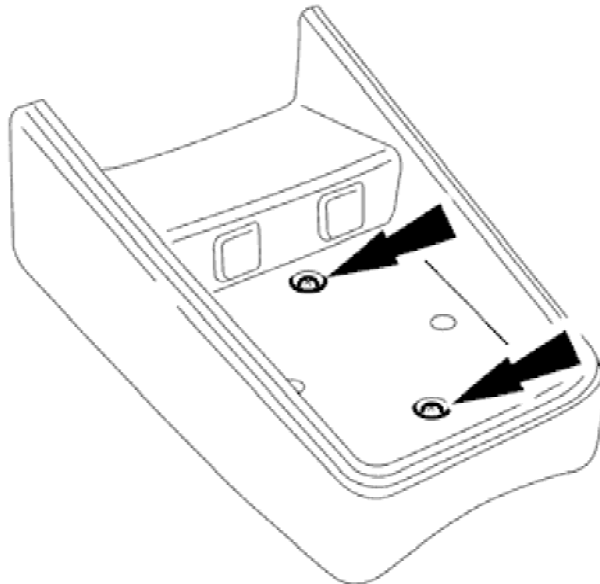

E36363

2. Slacken and remove the two rear extension securing screws.

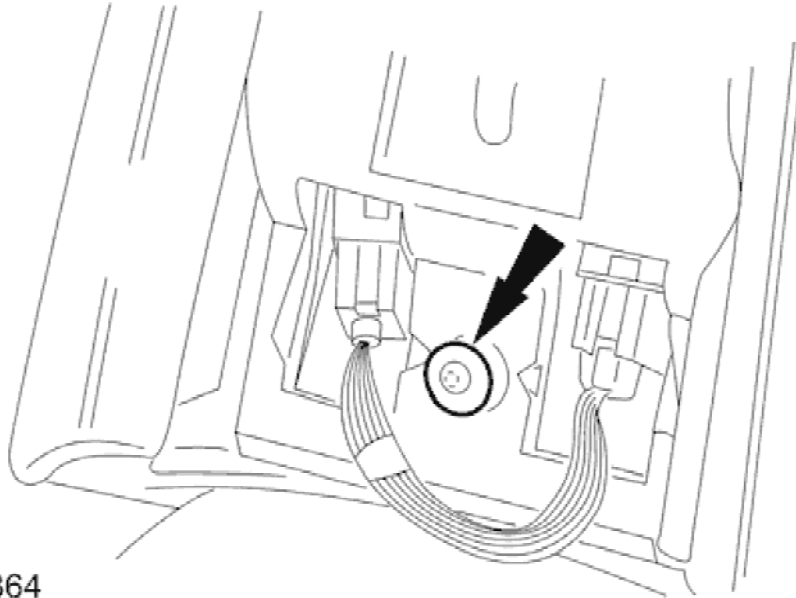

E36364

3. Remove rear seat heater switches.
  - Position rear extension for access and slacken and remove screw retaining switches.
  - Mark both harness multiplugs to ensure correct reconnection and disconnect multiplugs.
  
4. Remove heater switches.

### Installation

1. Position rear seat heater switches in rear extension.
  
2. Noting identity of multiplugs as marked during removal, connect harness multiplugs to heater switches.
  
3. Position switches in console extension and fit and tighten retaining screw.
  
4. Position and fully seat extension at rear of console and fit and tighten securing screws.
  
5. Carefully fit veneer panel to rear extension.