


## Front Door Trim Panel Finish Panel 76.47.11


### Removal

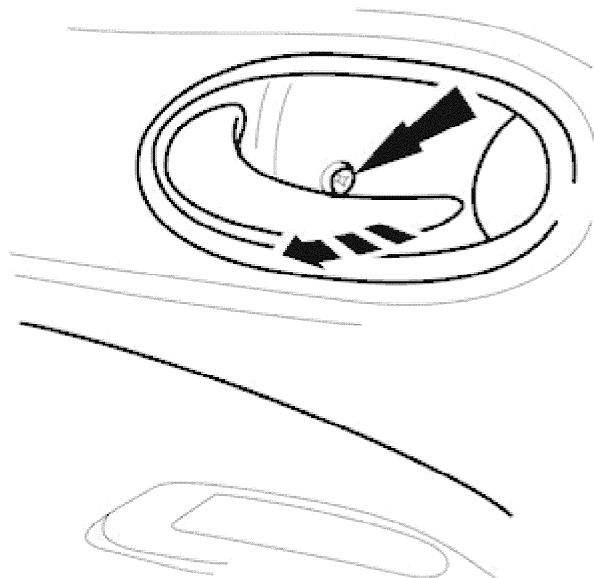

E36335

1. Remove interior door handle escutcheon.

- Remove cover from door handle escutcheon securing screw and slacken and remove screw.
- Pull door handle inwards and exercising care to avoid damaging tweeter, remove escutcheon from casing.

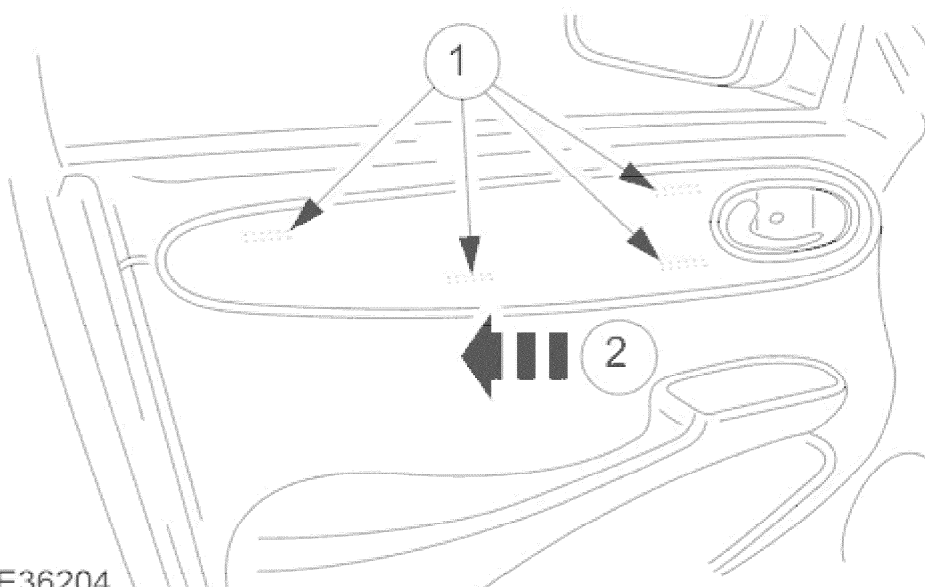

E36204

2. Remove veneer panel from casing.

1. Using a thin plastic lever, carefully ease rear of veneer panel inwards to release the two rear securing tangs.
2. Slide veneer panel rearwards to release front retainers.

# 2000 XJ RANGE - Interior Trim and Ornamentation - 501-05

## Installation

1. Position veneer panel on casing and slide forward to engage front retainers.
2. Using a soft pad or cloth, press rear of panel firmly to seat the securing tangs.
3. Fit door handle escutcheon.