


Radiator Grille Bezel 76.55.15

Removal

1. Remove radiator grills for access. Refer to <<76.55.03>>.

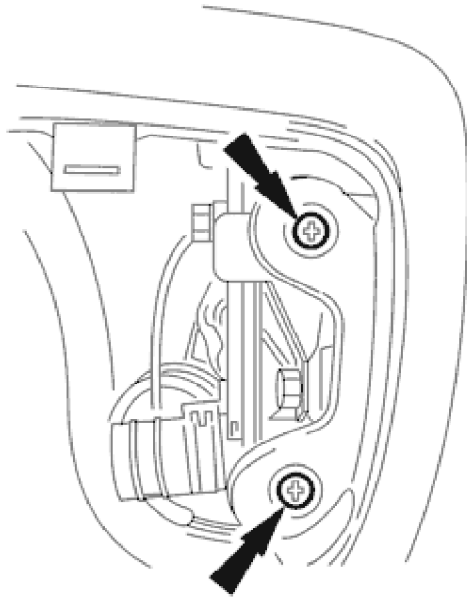

E36251

2. Slacken and remove the two screws securing each end of surround to BIW and remove surround from vehicle.
3. Remove and discard the two nylon screw inserts from each side of BIW.

Installation

1. Fit new screw inserts to BIW locations.
2. Position grill surround on BIW and fit and tighten securing screws.
3. Fit radiator grills. Refer to <<76.55.03>>.