


Exterior Mirror Glass 76.10.53




Removal CAUTION:

If as a result of accidental impact, a powered fold-back mirror is moved 'out of position', it must only be re-positioned by initiating the fold-back sequence as described in this section. No attempt must be made to manually return the mirror to the normal position. Failure to adopt this procedure will result in vibration of the unlocked mirror head and consequent loss or distortion of rear vision.

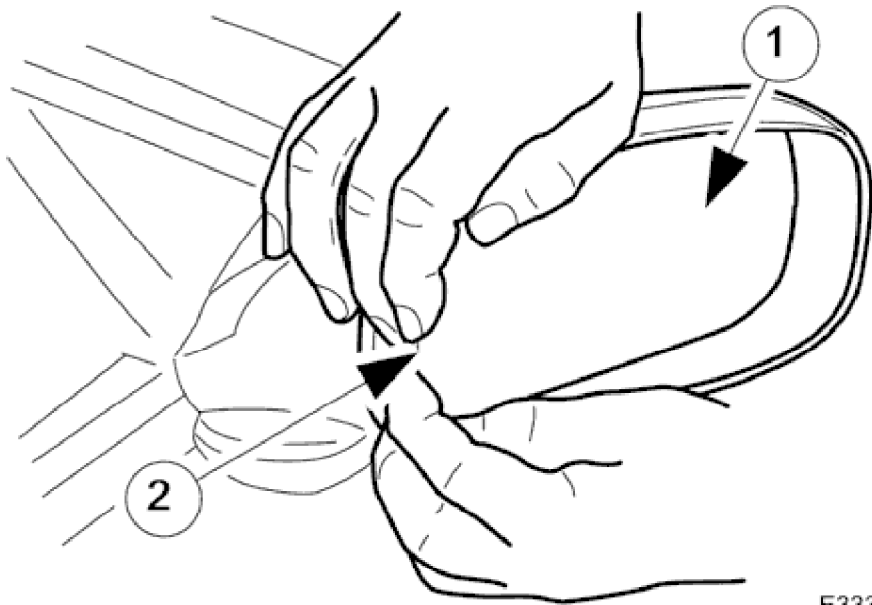

E33380

- 1. Remove exterior mirror glass.
 - 1. Motor glass to fully inward position.
 - 2. Pressing inner edge of glass outwards, ease outer extremity rearwards away from mirror housing.

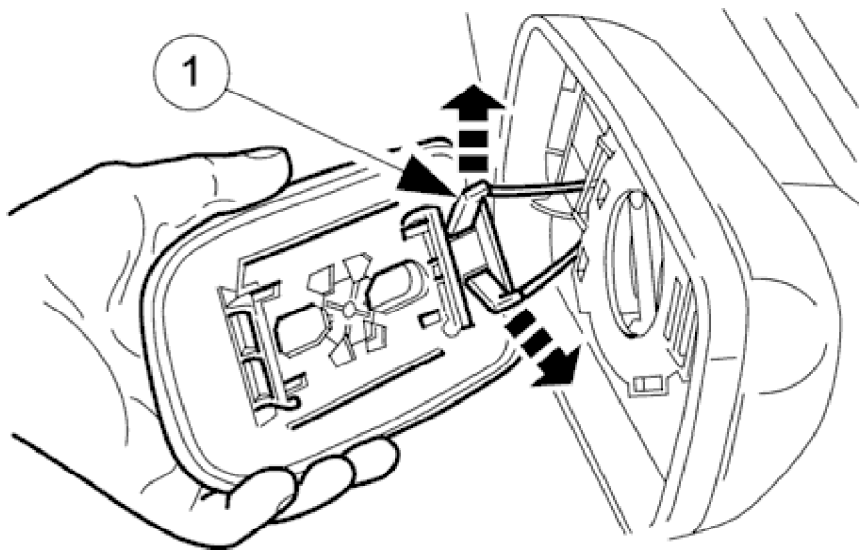

E33420

2001 XJ RANGE - Rear View Mirrors - 501-09

- 2. Disconnect and remove mirror glass.
 - 1. Ease glass clear of base, disconnect the two spade connectors and remove glass from mirror housing.

Installation



E33423

- 1. Fit glass to mirror housing.
 - Holding glass in position, connect the two spade connectors.
 - Engage the mirror inner retainer on the motor lug and press the mirror outer edge forward to engage the outer retainer.