


1999 XJ RANGE - Instrument Panel and Console - 501-12

Floor Console 76.25.01


Removal

1. Turn ignition switch to position II and apply footbrake.
2. Move gear selector to the the 'D' position. and release footbrake.
3. Turn ignition switch to position'O'
4. Remove battery cover and disconnect ground cable from battery terminal. Refer to <<86.15.19>>.
5. Where fitted, remove centre console rear extension. Refer to <<76.25.05>>.
6. Remove fascia centre veneer panel. Refer to <<76.47.06>>.

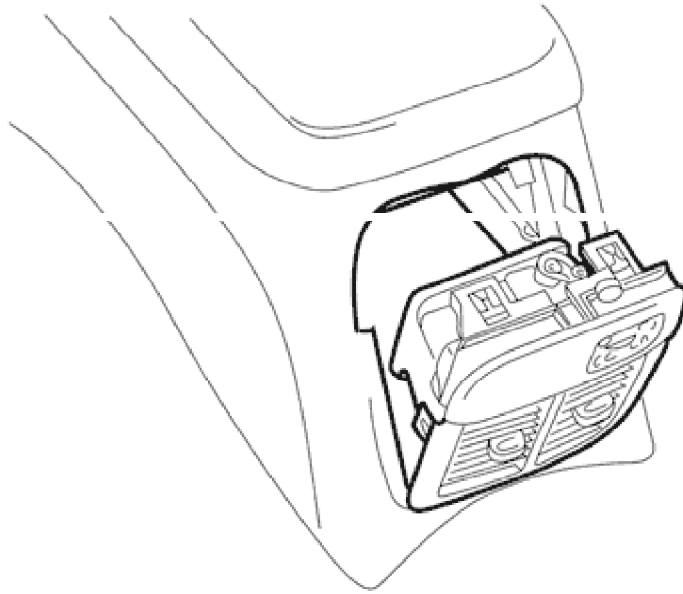

E36211


7. Using a thin plastic lever, carefully release the rear air distribution control grill tangs at top and sides and remove grill complete with veneer panel and control.

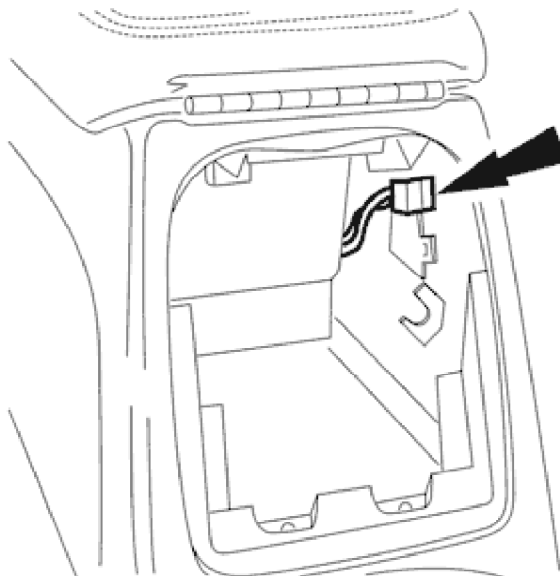

E36212


8. Disconnect cigar lighter and ashtray illumination harness (white) multiplug at RH rear. of console.

1999 XJ RANGE - Instrument Panel and Console - 501-12

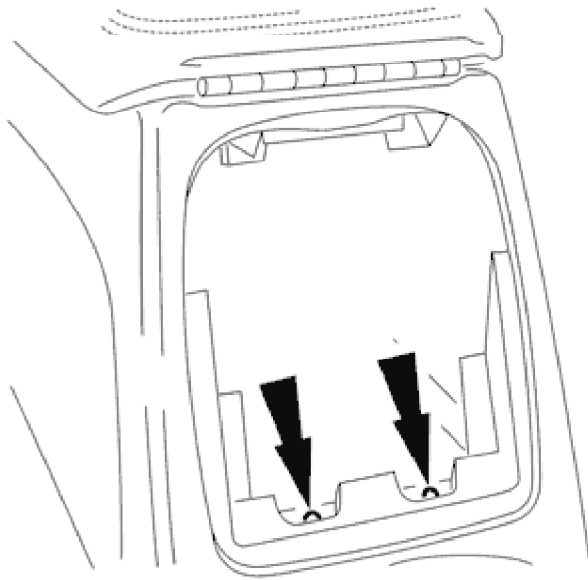

E36216


9. Slacken and remove the two console rear securing screws.
10. Remove 'J' gate finisher and veneer panel. Refer to <<76.25.24>> and <<76.25.26>>
11. Remove fascia centre veneer panel. Refer to <<76.47.06>>

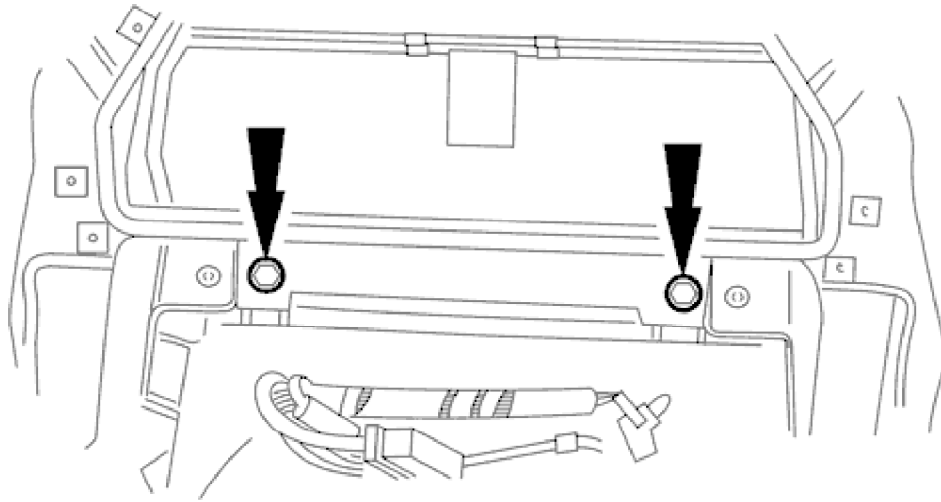

E35490


12. Slacken and remove the two centre console front securing screws.

1999 XJ RANGE - Instrument Panel and Console - 501-12

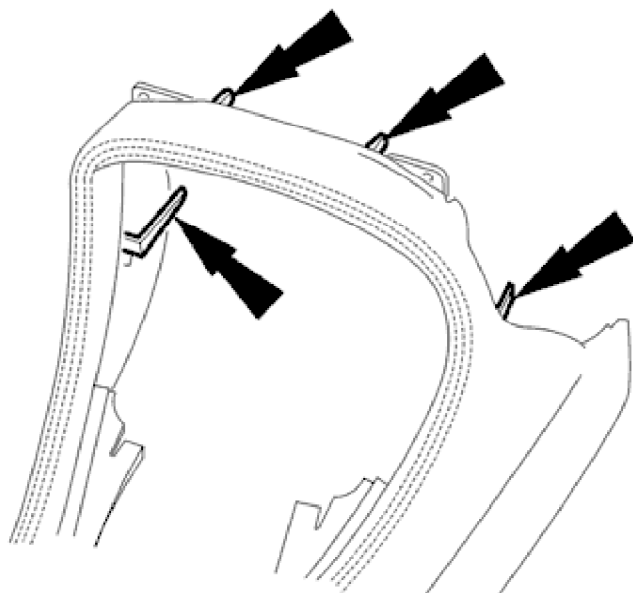

E36217

13. Ensuring that harness is clear, pull console rearwards to withdraw front dowels from tunnel locations.
14. Remove console from vehicle.
15. Remove console ashtray. Refer to <<76.25.25>>.
16. Remove glovebox and lid. Refer to <<76.25.16>> and <<76.25.18>>.

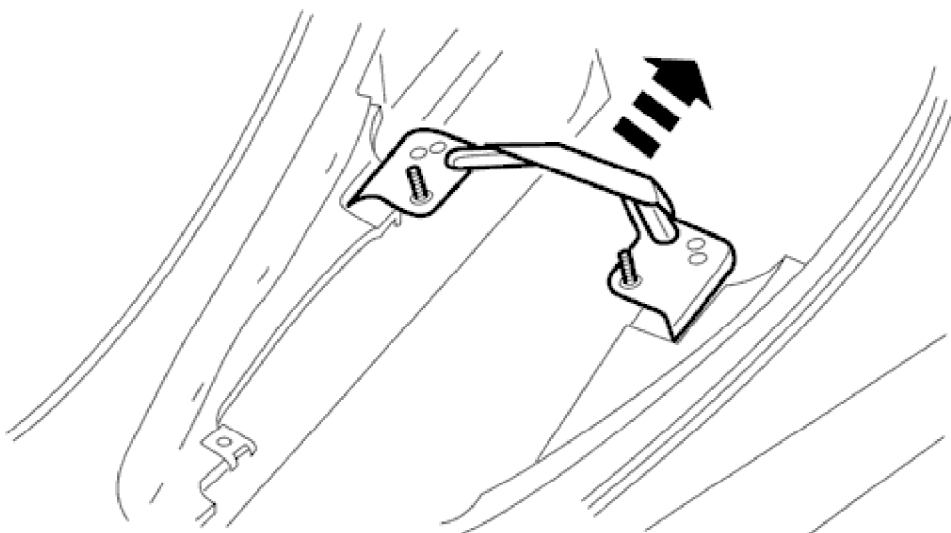

E35517

17. Slide stud mounting plate off front of console.

1999 XJ RANGE - Instrument Panel and Console - 501-12

Installation

1. Fit stud mounting plate to front of console.
2. Ensure that harness is correctly positioned.
3. Fit centre console ashtray. Refer to <<76.25.25>>.
4. Fit glovebox and lid to centre console. Refer to <<76.25.16>> and <<76.25.18>>.
5. Position console in vehicle, align correctly and push forward to engage front dowels.
6. Fit and tighten the console front securing screws.
7. Fit fascia centre veneer panel. Refer to <<76.47.06>>.
8. Fit and tighten the console rear securing screws.
9. Fit 'J' gate veneer panel and finisher. Refer to <<76.25.24>> and <<76.25.26>>.
10. Connect cigar lighter and ashtray illumination harness multiplug.
11. Where applicable, install console rear extension. Refer to <<76.25.05>>.
12. Fit and firmly seat air distribution control grill to rear of console.
13. Move 'J' gate selector to 'P'.
14. Connect ground cable to battery terminal and fit battery cover. refer to <<86.15.15>>.