


90° HOSE BENDS

Mackay Universal Hose bends are available in two separate specifications, one for water and the other for fuel applications. It is important to select the correct specification for your application.


Hose Bends UHB8 - UHB57 are manufactured from heat and ozone resistant EPDM to Spec. SAE J20R4 Class D-1 and are not suitable for the conveyance of petroleum products.

For Fuel applications use part numbers UHB8N to UHB57N which are manufactured from Fuel resistant Nitrile.

Please note that fuel application UHB's are made to customer order only with MOQ;s as below.

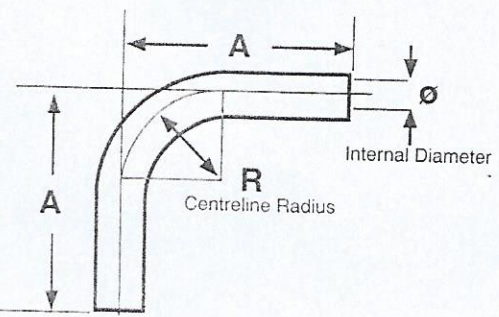

Outer cover formulated to provide good resistance to oil, heat abrasion and the effects of ozone

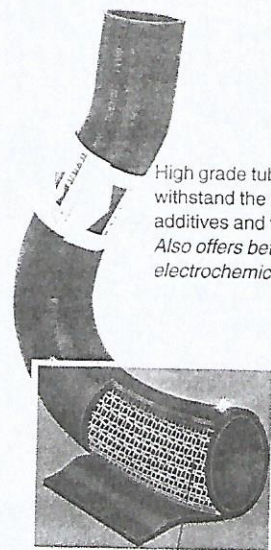

High grade tube compound to withstand the effects of coolant additives and fuels (nitrile version) Also offers better resistance to electrochemical degradation.

Tough Rayon or Kevlar lock-stitch knitting for maximum burst pressure

WATER APPLICATIONS Only

INTERNAL DIAMETER	PART NO.	LENGTH	
		A	R
8	UHB8-300	300	50
10	UHB10-300	300	50
13	UHB13	105	50
13	UHB13-300	300	50
16	UHB16	105	50
16	UHB16-300	300	50
19	UHB19	105	50
19	UHB19-300	300	50
25	UHB25	105	50
25	UHB25-300	300	50
31	UHB31	120	60
31	UHB31-300	300	60
38	UHB38	120	60
38	UHB38-300	300	60
44	UHB44	140	70
44	UHB44-300	300	70
50	UHB50	140	70
50	UHB50-300	300	70
57	UHB57	170	85
57	UHB57-300	300	85
63	UHB63	170	95
63	UHB63-300	300	95

FUEL APPLICATIONS Only

Non Stocked Product Made to customer order. MOQ Applies

INTERNAL DIAMETER	PART NO.	LENGTH		MOQ
		A	R	
8	UHB8-300N	300	50	300
10	UHB10-300N	300	50	300
13	UHB13N	105	50	850
13	UHB13-300N	300	50	300
16	UHB16N	105	50	850
16	UHB16-300N	300	50	300
19	UHB19N	105	50	400
19	UHB19-300N	300	50	150
25	UHB25N	105	50	100
25	UHB25-300N	300	50	300
31	UHB31N	120	60	850
31	UHB31-300N	300	60	300
38	UHB38N	120	60	100
38	UHB38-300N	300	60	300
44	UHB44N	140	70	100
44	UHB44-300N	300	70	300
50	UHB50N	140	70	nil
50	UHB50-300N	300	70	nil
57	UHB57N	170	85	100
57	UHB57-300N	300	85	300