

JSI 1485


Fig. 10

Fit and fully seat the valet switch to the cowl by pushing home firmly from the outside (1, Fig. 10).

Secure the LED bezel as above (2, Fig. 10).

Tighten the securing nuts.

Using the repair strips provided, secure the link harness to the radio aerial antenna housing, ensuring that the link harness tube is accessible (2, Fig. 6).

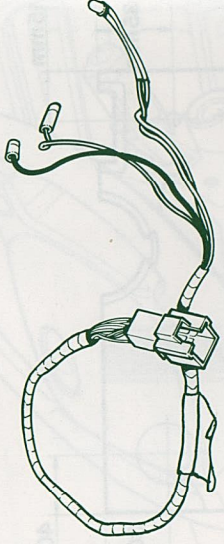

JSI 1486

Fig. 11

Connect the LED/valet link harness (Fig. 11) to the valet switch using the two lucar connectors (black to upper lucar; 1, Fig. 12).