

Fig. 16

Secure the link harness neatly using the ratchet straps supplied (4, Fig. 16).

Raise the dash liner and secure in place with the quarter turn fastener. Using suitable equipment, raise and support the front end of the vehicle, using axle stands.

Remove the left hand front wheel and tyre assembly.

Undo and remove the two lower securing nuts from the left hand front wheel arch front liner (1, Fig. 17).

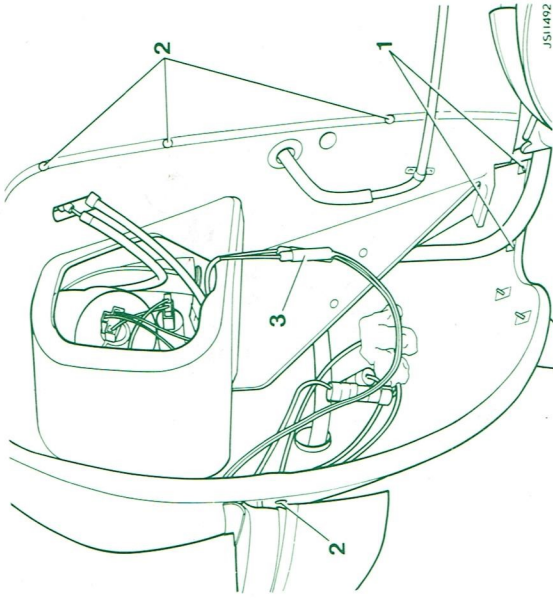


Fig. 17

Undo and remove the remaining four screws securing the liner (2, Fig. 17).

Displace and remove the liner.