


JSI 1487

Fig. 12

Fit and fully seat the LED to the cowl by pushing firmly into the LED bezel from the inside (2, Fig. 12)

Turn and remove the quarter turn fastener and lower the driver's side dash liner.

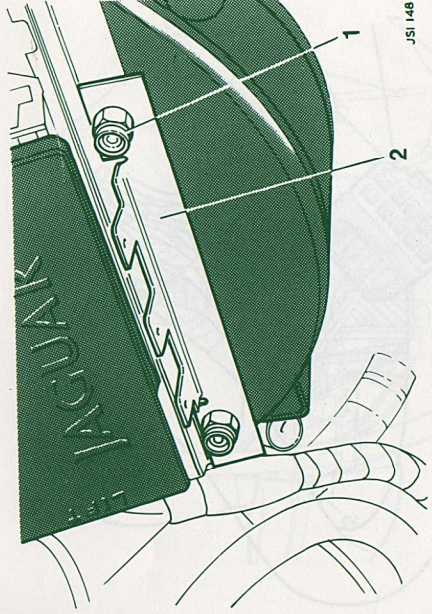

JSI 1488

Fig. 13

Undo but do not remove the fuse box lower securing nuts (1, Fig. 13).

Fit and align the relay mounting bracket (2, Fig. 13).

Tighten the fuse box securing nuts (1, Fig. 13).