


Seating - Rear Seat Armrest

Removal and Installation

Removal

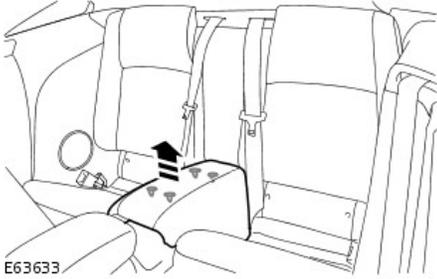

1. Remove the rear seat armrest.

- Release from the 4 clips.

Installation


1. Install the rear seat armrest.

- Secure with the clips.


Instrument Panel and Console - Floor Console Finish Panel

Removal and Installation


Removal

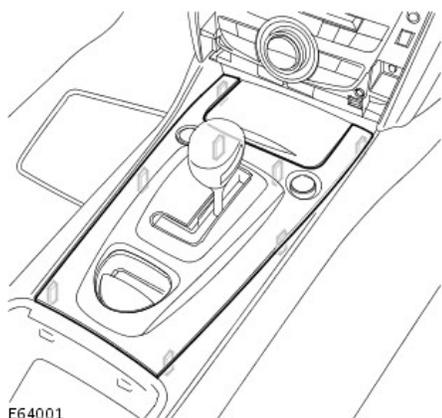


E64001

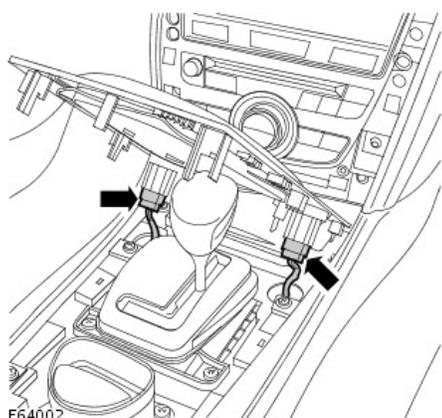

E64002

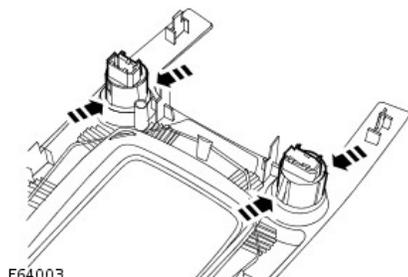

E64003

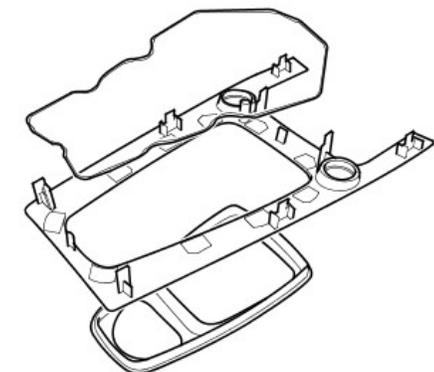

E64004

1. Depress the footbrake and move the gear selector lever to NEUTRAL.

2.  **CAUTION:** Care must be taken to avoid damage to the mating surfaces.

Release the floor console veneer trim panel.

- Carefully release the 8 clips.

3. Remove the floor console veneer trim panel.

- Disconnect the engine START/STOP switch electrical connector.
- Disconnect the automatic speed limiter (ASL) switch electrical connector.

4. **NOTE:** Do not disassemble further if the component is removed for access only.

• **NOTE:** Note the fitted position.

Remove the switches.

- Depress the 2 retaining clips.

5. Remove the gear selector lever surround trim panel.

- Remove the wire clip.

Installation

1. Install the gear selector lever surround trim panel.

- Install the wire clip.

2. Install the switches.

3. Install the floor console veneer trim panel.


- Connect the electrical connectors.
- Carefully align and secure the clips.

4. Return the gear selector lever to PARK.


Instrument Panel and Console - Floor Console

Removal and Installation


Removal

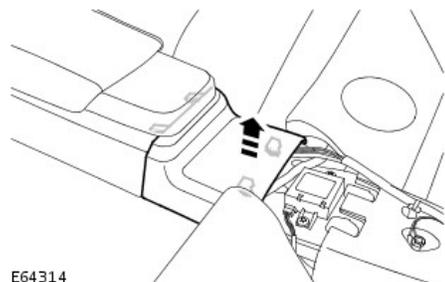


E64314

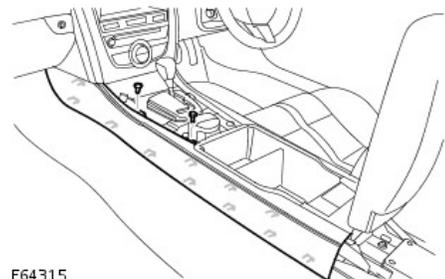


E64315

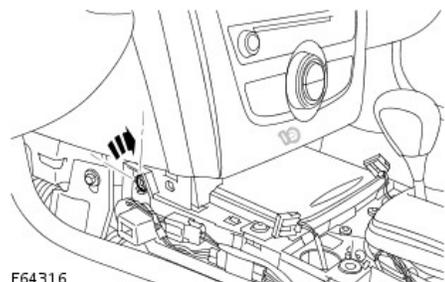

E64316

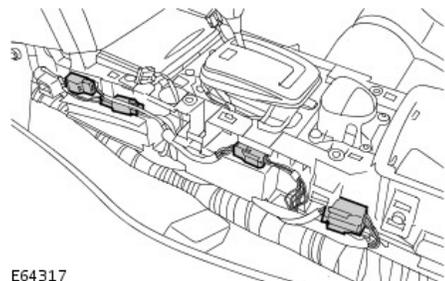

E64317

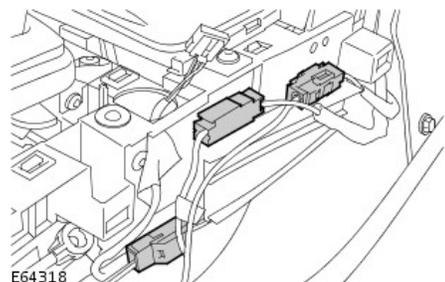


E64318


1. Remove the rear seat armrest.
For additional information, refer to: [Rear Seat Armrest](#) (501-10 Seating, Removal and Installation).
2. Remove the floor console veneer trim panel.
For additional information, refer to: [Floor Console Finish Panel](#) (501-12 Instrument Panel and Console, Removal and Installation).
3. Remove the floor console rear panel.
 - Carefully release the 2 clips.
4. Remove the floor console side panel trim.
 - Remove the 2 Torx bolts.
 - Carefully release 11 clips.
 - Repeat the procedure and remove the opposite hand.
5. Release the 2 Torx latches.
6. Release the LH side floor console electrical harness connector blocks.
 - Carefully release the 4 clips.
7. Release the RH side floor console electrical harness connector blocks.
 - Carefully release the 3 clips.
8. Release the wiring harness clip.




E64319

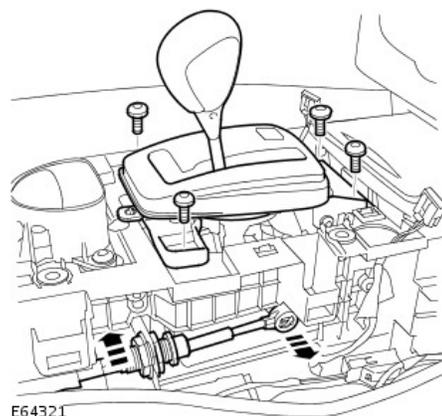 E64320


E64321

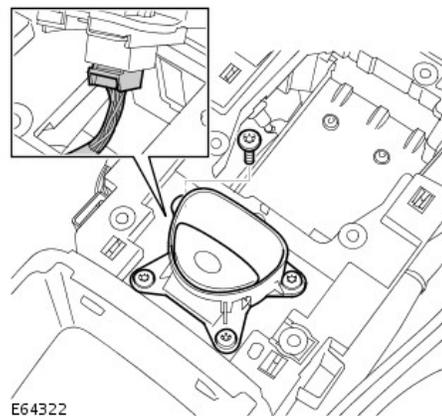

E64322

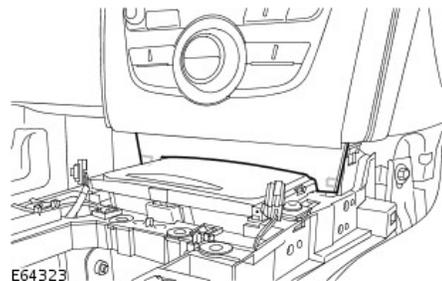

E64323

9. Disconnect the gear selector assembly electrical connector.

10. Remove the gear selector assembly.

- Carefully disconnect the selector cable ball joint.
- Remove the 4 Torx bolts.
- Release the electrical harness.

11. **NOTE:** Use an additional wrench to prevent the component from rotating.

Release the gear selector cable at the abutment.

- Loosen the locknut.

12. Remove the parking brake switch.


- Remove the 4 Torx bolts.
- Disconnect the electrical connector.

13. Remove the ashtray trim panel.


- Release the 2 clips.

14. Release the floor console.

- Remove the 6 Torx bolts.
- Lift and carefully withdraw from the instrument panel.

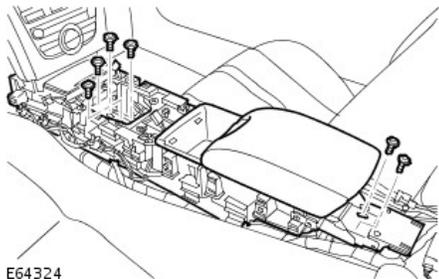


E64324

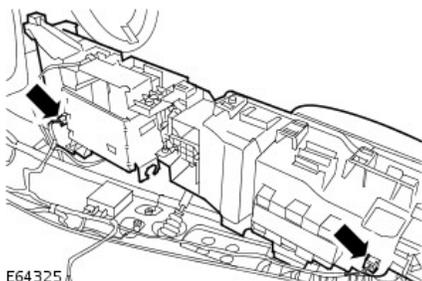


E64325



E64326

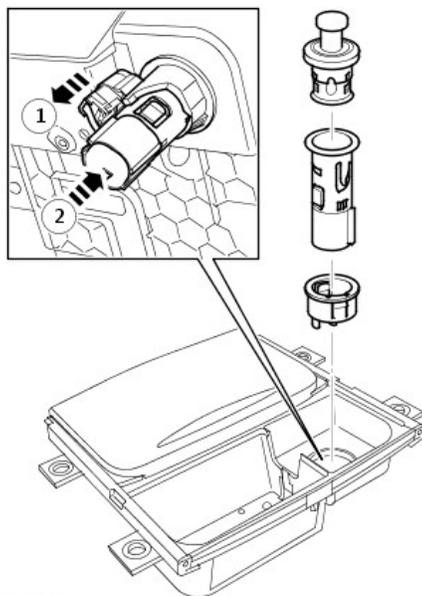

E64327

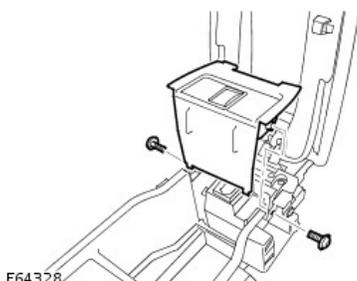

E64328

15. Remove the floor console.

- Disconnect the cigar lighter electrical connector.
- Disconnect the keyless vehicle module electrical connector.

16. NOTE: Do not disassemble further if the component is removed for access only.

Remove the ashtray.

- Remove the 4 Torx bolts.
- Remove the ashtray insert.


17. Remove the cigar lighter.

18. Remove the keyless start control module trim cover.


- Remove the 2 Torx screws.

19. Remove the floor console lid.


- Remove the 2 Torx bolts.
20. Remove the keyless start control module.
- Remove the 2 Torx screws.
21. Remove the cubby box liner.

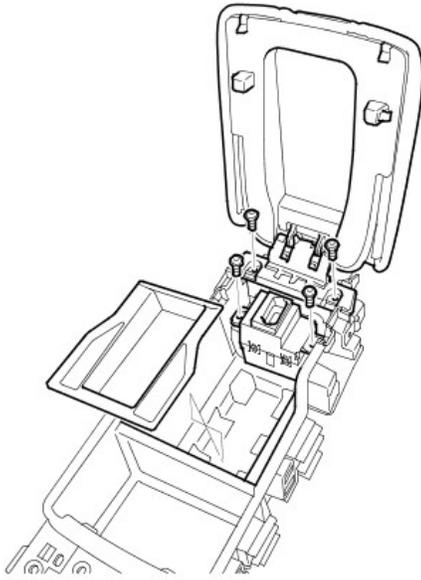

E64329

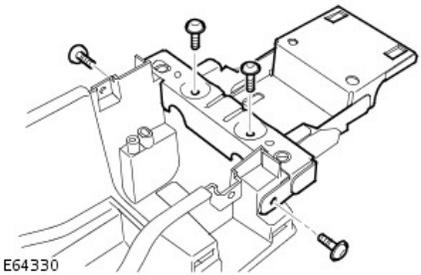

E64330

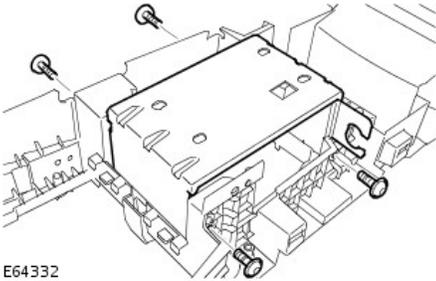

E64332

Installation

22. Remove the floor console rear extension bracket.
- Remove the 4 Torx bolts.
23. Remove the floor console central mounting bracket.
- Remove the 4 Torx bolts.
1. Install the floor console central mounting bracket.
- Install the Torx bolts, but do not tighten fully at this stage.
2. Install the floor console rear extension bracket.
- Tighten the Torx bolts to 6 Nm (4 lb.ft).
3. Install the keyless start control module.
- Install the Torx screws.
4. Install the cubby box liner.
5. Install the floor console lid.
- Install the Torx bolts and tighten to 6 Nm (4 lb.ft).
6. Install the keyless start control module trim cover.
- Install the Torx screws.
7. Install the cigar lighter assembly.
8. Install the ashtray.
- Install the Torx bolts and tighten to 6 Nm (4 lb.ft).
9. Install the floor console.

- Connect the cigar lighter electrical connector.
 - Connect the keyless vehicle module electrical connector.
 - Align the floor console with the Torx latch spigots and secure the latches.
 - Install the Torx bolts, tighten the M6 bolts to 10 Nm (7 lb.ft) and the M8 bolts to 25 Nm (18 lb.ft).
- 10.** Install the ashtray trim panel.
- Carefully secure the clips.
- 11.** Install the parking brake switch.
- Connect the electrical connector.
 - Tighten the Torx bolts to 6 Nm (4 lb.ft).
- 12.** NOTE: Use an additional wrench to prevent the component from rotating.
- Install the gear selector cable to the floor console abutment.
- Tighten the locknut to 15 Nm (11 lb.ft).
- 13.** Install the gear selector assembly.
- Position the electrical harness.
 - Install the Torx bolts and tighten to 6 Nm (4 lb.ft).
 - Connect the selector cable ball joint.
- 14.** Connect the gear selector assembly electrical connector.
- 15.** Install the RH side floor console electrical harness connector blocks.
- Carefully align and secure the clips.
- 16.** Install the LH side floor console electrical harness connector blocks.
- Carefully align and secure the clips.
- 17.** Secure the Torx latches.
- 18.** Install the floor console side panel trim.
- Carefully align and secure the clips.
 - Tighten the Torx screws to 6 Nm (4 lb.ft).
 - Install the opposite hand.
- 19.** Install the floor console rear panel.
- Align the lugs and secure the clips.
- 20.** Install the floor console veneer trim panel.
For additional information, refer to: [Floor Console Finish Panel](#) (501-12 Instrument Panel and Console, Removal and Installation).
- 21.** Install the rear seat armrest.
For additional information, refer to: [Rear Seat Armrest](#) (501-10 Seating, Removal and Installation).