


Wiring Symbols

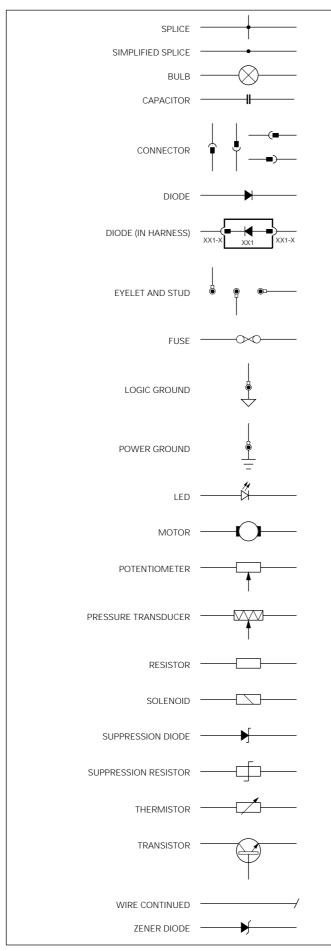

Wiring Color Codes

Ν	Brown	Ο	Orange
В	Black	S	Slate
W	White	L	Light
Κ	Pink	U	Blue
G	Green	Р	Purple
R	Red	BRD	Braid
Υ	Yellow		

When a wire has two color code letters, the first letter indicates the main color and the subsequent letter indicates the tracer color.

Wiring Harness Codes

VV 11 11 1	ig Harriess Obacs	
Code	Description	
AC	Air Conditioning (Climate Control)	
AN	Generator Suppression Module	
AS	Generator to Starter	
BB	Trunk Bridging Link	
ВС	Main Power Distribution	
BL	Trunk Lid	
ВТ	Trunk	
DD	Door, Driver	
DP	Door, Passenger	
EL	Engine Management Speed Control Link	
EM	Engine Management	
EN	Engine Management Side Marker Link	
FC	Fascia	
FL	LH Front Wheel	
FR	RH Front Wheel	
IC	In-Car Entertainment	
IS	Inclination Sensor Link	
LF	Left Forward	
LL	Power Steering Link	
PΙ	Engine	
QL	Convertible LH Quarter Light Link	
QR	Convertible RH Quarter Light Link	
RF	Roof	
RH	Rearward	
RL	LH Rear Wheel	
RR	RH Rear Wheel	
RT	Radio Telephone	
SA	Starter to Generator Link	
SC	Column Switchgear	
SD	Seat, Driver	
SP	Seat, Passenger	
SW	Steering Wheel	
TL	Telephone	
Code	Numbering	
When numbering connectors, grounds and splice:		

When numbering connectors, grounds and splices, Jaguar Engineering uses a three-position format: AC001, AC002, etc. Because space is limited in this Electrical Guide, the codes have been shortened. Thus AC001-001 becomes AC1-1, AC002-001 becomes AC2-1, etc.

DATE OF ISSUE: September 2000